



iSAQB
Working Groups

Glossary of Software Architecture Terminology

Edition 2020



iSAQB Glossary of Software Architecture Terminology

Gernot Starke, Ulrich Becker, Carola Lilienthal, Michael Mahlberg, Simon Kölsch, Roger Rhoades, Sebastian Fichtner, Andreas Rausch, Phillip Ghadir, Mahbouba Gharbi, Matthias Bohlen and Mirko Hillert

This book is for sale at <http://leanpub.com/isaqbglossary>

This version was published on 2020-02-04



This is a [Leanpub](#) book. Leanpub empowers authors and publishers with the Lean Publishing process. [Lean Publishing](#) is the act of publishing an in-progress ebook using lightweight tools and many iterations to get reader feedback, pivot until you have the right book and build traction once you do.



This work is licensed under a [Creative Commons Attribution-ShareAlike 4.0 International License](#)

Tweet This Book!

Please help Gernot Starke, Ulrich Becker, Carola Lilienthal, Michael Mahlberg, Simon Kölsch, Roger Rhoades, Sebastian Fichtner, Andreas Rausch, Phillip Ghadir, Mahbouba Gharbi, Matthias Bohlen and Mirko Hillert by spreading the word about this book on [Twitter!](#)

The suggested hashtag for this book is [#isaqbglossary](#).

Find out what other people are saying about the book by clicking on this link to search for this hashtag on Twitter:

[#isaqbglossary](#)

Contents

| | |
|---|-----------|
| Introduction | 1 |
| Personal Comments | 1 |
| Terms Can Be Referenced | 2 |
| License | 3 |
| Acknowledgements | 4 |
| Contributing | 4 |
| Glossary of Terms | 5 |
| Translations | 55 |
| Translations English to German | 55 |
| Translations German to English | 59 |
| Categories | 63 |
| References and Resources | 64 |
| Appendix A: The iSAQB e.V. Association | 69 |
| Appendix B: About the Authors | 70 |
| Appendix C: About our Cause | 74 |

Introduction

This book contains a glossary of *software architecture terminology*.

It can serve as a reference for preparation for the iSAQB e.V. examination *Certified Professional for Software Architecture - Foundation Level*©.

Please be aware: This glossary is **not** intended to be a primer or course book on software architecture, just a collection of definitions (and links to further information).

Furthermore, you find proposals for [translations](#) of the iSAQB terminology, currently between English and German (and vice-versa).

Finally this book contains numerous [references](#) to books and other resources, many of which we quoted in the definitions.

This book is work in progress.

Errors or omissions can also be reported in our issue tracker on [Github](#)¹, where the authors maintain the original sources for this book.

Personal Comments

Several of the terms contained in this book have been commented by one or several authors:



Comment (Gernot Starke)

Some terms might be especially important, or sometimes there are some subtle aspects involved. Comments like these give a personal opinion and do **not** necessarily reflect the iSAQB.

¹<https://github.com/isaqb-org/glossary/issues>

Terms Can Be Referenced

All terms in the glossary have unique URLs to the (free) online version of the book, therefore they can be universally referenced, both from online- and print documentation.

Our URL scheme is quite simple:

- The base URL is `https://leanpub.com/isaqbglossary/read`
- We just add the prefix `#term-` in front of the term to be referenced, then the term itself, with hyphens (“-“) instead of blanks.

For example our description of the term *software architecture* can be referenced (hyperlinked) with `https://leanpub.com/isaqbglossary/read#term-software-architecture`

Nearly all terms are hyperlinked with their full names, with very few examples that are referenced by their (common) abbreviations, like UML or DDD.

License



This book is licensed under a [Creative Commons Attribution 4.0 International License](https://creativecommons.org/licenses/by/4.0/)². The following is only a brief summary and no substitution for the real license.

The cc-4.0-by license means that you might:

- Share — copy and redistribute the material in any medium or format
- Adapt — remix, transform, and build upon the material for any purpose, even commercially.
- The licensor cannot revoke these freedoms as long as you follow the license terms.

You must:

- Give appropriate credit,
- Provide a link to the license (<https://creativecommons.org/licenses/by/4.0/>), and
- Indicate if (and which) changes were made with respect to the original.

²<https://creativecommons.org/licenses/by/4.0/>

Acknowledgements

Several parts of this glossary have been contributed by the following volunteers and sponsors:

- The definitions of about 120 terms have been donated by Gernot Starke, originally compiled for one of his [books](#)³.
- A number of definitions in context of system improvement and evolution was contributed by the [aim42](#)⁴ open source project.

Contributing

Contributions are welcome

In case find errors, omissions or typos, or want to contribute additional content - please feel free to do this via one of the following ways:

1. Open an issue in our [Github repository](#)^a
2. Fork the repository and create a pull request.
3. Discuss topics on the books' [Leanpub feedback page](#)^b
4. Write an email to the authors, also from the books' [website](#)^c

^a<https://github.com/isaqb-org/glossary/issues>

^b<https://leanpub.com/isaqbglossary/feedback>

^chttps://leanpub.com/isaqbglossary/email_author/new

Your input is highly appreciated by the authors.

³<https://leanpub.com/esa42/>

⁴<http://aim42.github.io/>

Glossary of Terms

Abstraction

A view of an element that focuses on the information relevant to a particular purpose and ignores the remainder of the information.

Category: Design-Principle

Abstractness

Metric for the source code of object oriented systems: The number of abstract types (interfaces and abstract classes) divided by the total number of types.

Category: Metric

Accessibility Quality Attribute

Degree to which a product or system can be used by people with the widest range of characteristics and capabilities to achieve a specified goal in a specified context of use. Is a sub-characteristic of: [usability](#). Refer to [ISO 25010⁵](#) website.

Category: Quality, ISO 25010

ACL

Access Control Lists are a way to organize and store permissions of an [principal](#) for a specific entity. Beside implementations on an application level a typical example for an ACL is the management of file permissions on unix based operating systems.

Since ACLs don't scale well on a large base it is common to model access control based on roles ([RBAC](#)).

Category: Security

Accountability Quality Attribute

Degree to which the actions of an entity can be traced uniquely to the entity. Is a sub-characteristic of: [security](#). Refer to [ISO 25010⁶](#) website.

Category: Quality, ISO 25010

⁵<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

⁶<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

Accreditation

Determination procedure and certification by an authorised accreditation body (here the iSAQB(R)) confirming that the applicant meets the organizational, technical and qualitative requirements as a [training provider](#).

Accreditation Body

The application for [accreditation](#) must be submitted through the *accreditation body* designated by the iSAQB. The accreditation body is the contact point for all questions of the training provider during the [accreditation](#). It coordinates the accreditation procedure, carries out the formal assessment of the documents submitted and organises the technical assessment in the [AUDIT WORKING GROUP](#).

Accredited Training Provider

[Training Provider](#) with valid [accreditation](#) issued by the iSAQB(R).

Acyclic Dependencies Principle

A fundamental principle for designing the structure of software systems (also see [Package Principles](#)). It demands that there be no cycles in the dependence graph of a system, which is also a [necessity](#)⁷ for *hierarchical decomposition*⁸.

Avoiding dependence cycles is essential for [low coupling](#) and [maintainability](#), as *all* components in a dependence cycle effectively (even if indirectly) depend on each other, which makes it hard to understand, change or replace any part of the cycle in isolation (also see [Lilienthal-2019](#)).

Although Robert C. Martin ([Martin-2003](#)) expressed it in terms of large components of object-oriented software, the ADP is a *universal* principle. It goes back (at least) to one of the origins of software architecture, the classic 1972 paper “On the Criteria To Be Used in Decomposing Systems into Modules” ([Parnas-1972](#)), which *concludes* that hierarchical structure along with “clean” decomposition are desirable properties of any system.

It can be argued that a dependence cycle, even before considering its various practical problems, is logically already as flawed as a [circular argument](#)⁹ or [circular definition](#)¹⁰. As a structural contradiction, a cycle can neither be an *appropriate* nor meaningful model of the inherent nature and purpose of a system. And this conceptual divergence alone virtually guarantees for (unpredictable) problems to arise, which is exactly what a *principled* approach guards against.

Category: Design-Principle

⁷https://en.wikipedia.org/wiki/Directed_acyclic_graph

⁸https://en.wikipedia.org/wiki/Functional_decomposition

⁹https://en.wikipedia.org/wiki/Circular_reasoning

¹⁰https://en.wikipedia.org/wiki/Fallacies_of_definition#Circularity

Adaptability Quality Attribute

Degree to which a product or system can effectively and efficiently be adapted for different or evolving hardware, software or other operational or usage environments. Is a sub-characteristic of: [portability](#). Refer to [ISO 25010¹¹](#) website.

Category: Quality, ISO 25010

Adapter

The adapter is a design pattern that allows the interface of an existing component to be used from another interface. It is often used to make existing components cooperate with others without modifying their source code.

Category: Design-Pattern, Foundation.

Aggregate

Aggregate is a building block of [Domain-Driven Design](#). Aggregates are complex object structures that are made of [entities](#) and [value objects](#). Each aggregate has a root entity and is regarded as a unity when it comes to changes. An aggregate ensure consistency and integrity of its contained entities with invariants.

Category: DDD

Aggregation

A form of object [composition](#) in object-oriented programming. It differs from composition, as aggregation does not imply ownership. When the element is destroyed, the contained elements remain intact.

Category: Foundation

Analysability Quality Attribute

Degree of effectiveness and efficiency with which it is possible to assess the impact on a product or system of an intended change to one or more of its parts, or to diagnose a product for deficiencies or causes of failures, or to identify parts to be modified. Is a sub-characteristic of: [maintainability](#). Refer to [ISO 25010¹²](#) website.

Category: Quality, ISO 25010

Appropriateness

(syn: adequacy) Suitability for a particular purpose.

¹¹<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

¹²<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

Appropriateness Recognizability Quality Attribute

Degree to which users can recognize whether a product or system is appropriate for their needs. Is a sub-characteristic of: [usability](#). Refer to [ISO 25010¹³](#) website.

Category: Quality, ISO 25010

arc42

Free [template¹⁴](#) for communication and documentation of software architectures. arc42 consists of 12 (optional) parts or sections.

Category: Communication, Documentation

Architecture

See [Software Architecture](#)

Category: ISO-IEC-IEEE-42010

Architectural Decision

Decision, which has an sustainable or essential effect on the architecture.

Example: Decision about database technology or technical basics of the user interface.

Following ISO/IEC/IEEE 42010 an architectural decision pertain to system concerns. However, there is often no simple mapping between the two. A decision can affect the architecture in several ways. These can be reflected in the architecture description (as defined in ISO/IEC/IEEE 42010).

Category: ISO-IEC-IEEE-42010

Architecture description

Work product used to express an architecture (as defined in ISO/IEC/IEEE 42010).

Category: ISO-IEC-IEEE-42010

Architecture description element

An architecture description element is any construct in an architecture description. architecture description elements are the most primitive constructs discussed in ISO/IEC/IEEE 42010. All terms defined in ISO/IEC/IEEE 42010 are a specialization of the concept of an architecture description element (as defined in ISO/IEC/IEEE 42010).

Category: ISO-IEC-IEEE-42010

¹³<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

¹⁴<http://arc42.org>

Architecture description language

An architecture description language (ADL) is any form of expression for use in architecture descriptions (as defined in ISO/IEC/IEEE 42010).

Examples are Rapide, Wright, SysML, ArchiMate and the viewpoint languages of RM-ODP [ISO 10746].

Category: ISO-IEC-IEEE-42010

Architecture evaluation

Quantitative or qualitative assessment of a (software or system) architecture. Determine if an architecture can achieve its target qualities or quality attributes?

See [Assessment](#)



Comment (Gernot Starke)

In my opinion the terms *architecture analysis* or *architecture assessment* are more appropriate, as *evaluation* contains *value*, implying numerical assessment or metrics, which is usually only *part* of what you should do in architecture analysis.

Architecture framework

Conventions, principles and practices for the description of architectures established within a specific domain of application and/or community of stakeholders (as defined in ISO/IEC/IEEE 42010).

Examples are:

- Generalised Enterprise Reference Architecture and Methodologies (GERAM) [ISO 15704] is an architecture framework.
- Reference Model of Open Distributed Processing (RM-ODP) [ISO/IEC 10746] is an architecture framework.

Category: ISO-IEC-IEEE-42010

Architecture goal

(syn: Architectural quality goal, Architectural quality requirement): A quality attribute that the system needs to achieve and the quality attribute is understood to be an architectural issue.

Hence, the architecture needs to be designed in a way to fulfill this architectural goal. These goals often have *long term character* in contrast to (short term) project goals.

Category: Fundamental

Architecture model

An architecture view is composed of one or more architecture models. An architecture model uses modelling conventions appropriate to the concerns to be addressed. These conventions are specified by the model kind governing that model. Within an architecture description, an architecture model can be a part of more than one architecture view (as defined in ISO/IEC/IEEE 42010).

Category: ISO-IEC-IEEE-42010

Architecture objective

See [architecture goal](#).

Architectural (architecture) pattern

“An architectural pattern expresses a fundamental structural organization schema for software systems. It provides a set of predefined sub- systems, specifies their responsibilities, and includes rules and guidelines for organizing the relationships between them” (Buschmann+1996, page 12). Similar to *Architecture style*

Examples include:

- Model-View-Controller
- Layers
- Pipes-and-Filter
- [CQRS](#)

Architecture quality requirement

See [architecture goal](#).

Architecture rational

Architecture rationale records explanation, justification or reasoning about architecture decisions that have been made. The rationale for a decision can include the basis for a decision, alternatives and trade-offs considered, potential consequences of the decision and citations to sources of additional information (as defined in ISO/IEC/IEEE 42010).

Category: ISO-IEC-IEEE-42010

Architecture style

Description of element and relation types, together with constraints on how they can be used. Often called *architecture patterns*. Examples: Pipes-and-Filter, Model-View-Controller, Layers.

Architecture view

A representation of a system from a specific perspective. Important and well-known views are:

- [Context view](#),
- Building block view
- Runtime view
- Deployment view

[Bass+2012] and [Rozanski+11] extensively discuss this concept.

Following ISO/IEC/IEEE 42010, an architecture view is a work product expressing the architecture of a system from the perspective of specific system concerns (as defined in ISO/IEC/IEEE 42010).

Category: ISO-IEC-IEEE-42010

Architecture viewpoint

Work product establishing the conventions for the construction, interpretation and use of architecture views to frame specific system concerns (as defined in ISO/IEC/IEEE 42010).

Category: ISO-IEC-IEEE-42010

Artifact

Tangible by-product created or generated during development of software. Examples of artifacts are use cases, all kinds of diagrams, UML models, requirements and design documents, source code, test cases, class-files, archives.

Asset

“In information security, computer security and network security an Asset is any data, device, or other component of the environment that supports information-related activities. Assets generally include hardware (e.g. servers and switches), software (e.g. mission critical applications and support systems) and confidential information”

(quoted from [Wikipedia](#)¹⁵)

Category: Security

Assessment

See also [Evaluation](#).

Gathering information about status, risks or vulnerabilities of a system. Assessment might concern potentially all aspects (development, organization, architecture, code etc.)

¹⁵[https://en.wikipedia.org/w/index.php?title=Asset_\(computer_security\)&oldid=694606042](https://en.wikipedia.org/w/index.php?title=Asset_(computer_security)&oldid=694606042)

Association

Defines a relationship between objects (in general: between modules). Each association can be described in detail by cardinalities and (role-)names.

See [coupling](#), [dependency](#) and [relationship](#)

Category: Foundation

Asymmetric Cryptography

Asymmetric cryptography algorithms are designed that the key which is used for encryption is different from the key used for decryption. The key for encryption is called “public-key” the key for decryption is called “private-key”. The public key can be published and used by anyone to encrypt information only readable by the party owning the private-key for decryption. See [Schneier, Public-Key Algorithms, page 17](#).

Asymmetric cryptography is fundamental for [PKI](#) and digital signatures.

Category: Security

ATAM

Architecture Tradeoff Analysis Method. Qualitative architecture evaluation method, based upon a (hierarchical) quality tree and concrete quality scenarios. Basic idea: Compare fine-grained quality scenarios (“quality-requirements”) with the corresponding architectural approaches to identify risks and tradeoffs.

Attack Tree

Formal way to describe different approaches of an attacker to reach certain goals. The tree is usually structured with the attack goal on top and different approaches as child nodes. Each approach is likely to have dependencies which are again listed as child nodes. The possibility of a certain way to attack an IT-system can be analyzed by assigning additional attributes to each node. Examples could be the estimated costs of an attack or if an attack approach is possible or not by referencing countermeasures.

See [Bruce Schneier on “Modeling security threats”¹⁶](#).

Category: Security

Audit Working Group:

The *audit working group* is responsible for the technical evaluation of training materials as well as for the monitoring and evaluation of training courses. The members of the audit working group, authorized by the iSAQB(R), are independent of the [training provider](#). The result of the assessments (the respective accreditation recommendation of the AUDIT WORKING GROUP) will be communicated to the [training provider](#) by the [accreditation body](#).

¹⁶https://www.schneier.com/academic/archives/1999/12/attack_trees.html

Authentication

Authentication is the process of confirming the claim of an identity by a given entity. Usually this is done by verifying at least one of the authentication factors which is known by the system:

- knowledge (e.g. password)
- ownership (e.g. security token)
- inherence (e.g. biometrics)

For a stronger authentication multiple factors can be requested or at least factors of two categories.

Category: Security

Authenticity Quality Attribute

Degree to which the identity of a subject or resource can be proved to be the one claimed. Is a sub-characteristic of: [security](#). Refer to [ISO 25010¹⁷](#) website.

Category: Quality, ISO 25010

Authorization

“Authorization or authorisation is the function of specifying access rights to resources related to information security and computer security in general and to access control in particular. More formally, “to authorize” is to define an access policy.”

(quoted from [Wikipedia¹⁸](#))

Category: Security

Availability

One of the basic [Security Goals](#) describing a system that can provide desired information when its needed. From a security perspective for example denial-of-service-attacks may prevent availability.

Category: Security

Availability Quality Attribute

Degree to which a system, product or component is operational and accessible when required for use. Is a sub-characteristic of: [reliability](#). Refer to [ISO 25010¹⁹](#) website.

Category: Quality, ISO 25010, Security

¹⁷<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

¹⁸<https://en.wikipedia.org/w/index.php?title=Authorization&oldid=739777234>

¹⁹<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

Blackbox

View on a [building block](#) (or [component](#)) that hides the internal structure. Blackboxes respect the *information hiding principle*. They shall have clearly defined input- and output interfaces plus a precisely formulated *responsibility* or *objective*. Optionally a blackbox defines some quality attributes, for example timing behavior, throughput or security aspects.

Category: Foundation

Bottom-up Approach

Direction of work (or strategy of processing) for modeling and design. Starting with something detailed or concrete, working towards something more general or abstract.

“In a bottom-up approach the individual base elements of the system are first specified in great detail. These elements are then linked together to form larger subsystems.” (quote from Wikipedia)

Bounded Context

Bounded Context is principle of the strategy design of [Domain-Driven Design](#). “A bounded context explicitly defines the context within which a [domain model](#) for a software system applies. Ideally, it would be preferable to have a single, unified model for all software systems in the same domain. While this is a noble goal, in reality it typically fragments into multiple models. It is useful to recognize this fact of life and work with it.” (quote from Wikipedia)

“Multiple domain models are in play on any large project. Yet when code based on distinct models is combined, software becomes buggy, unreliable, and difficult to understand. Communication among team members becomes confusing. It is often unclear in what context a model should not be applied. Therefore: Explicitly set boundaries in terms of team organization, usage within specific parts of the application, and physical manifestations such as code bases and database schemas. Keep the model strictly consistent within these bounds, but don't be distracted or confused by issues outside.” (quote from Wikipedia)

Category: DDD

Bridge

Design pattern in which an abstraction is decoupled from its implementation, so that the two can vary independently. In case you find that incomprehensible (as most people) - have a look [here](#)²⁰

Category: Design-Pattern

²⁰<http://www.cs.sjsu.edu/~pearce/modules/patterns/platform/bridge/index.htm>

Broker

An architecture pattern used to structure distributed software systems with decoupled components that interact by (usually remote) service invocations.

A broker is responsible for coordinating communication, such as forwarding requests, as well as for transmitting results and exceptions.

Category: Architecture-Pattern

Building Block

General or abstract term for all kinds of artifacts from which software is constructed. Part of the static structure ([Building Block View](#)) of software architecture.

Building blocks can be hierarchically structured - they may contain other (smaller) building blocks.

Some examples of alternative (concrete) names for building blocks: Component, module, package, namespace, class, file, program, subsystem, function, configuration, data-definition.

Building Block View

Shows the static structure of the system, how its source code is organized. Usually a hierarchical manner, starting from the [context view](#). Complemented by one or several [runtime scenarios](#).

Business Architecture

A blueprint of the enterprise that provides a common understanding of the organization and is used to align strategic objectives and tactical demands.

CA

A Certificate Authority issues digital certificates to a given subject in a [PKI](#). Usually there is a trust established to this authority which results in the same trust level to the issued certificates.

An example is the widely used TLS-PKI where every browser includes the root-certificates of a defined list of CAs. These CAs then check the identity of a given internet domain owner and digitally sign his certificate for the use with [TLS](#).

Category: Security

Capacity Quality Attribute

Degree to which the maximum limits of a product or system parameter meet requirements. Is a sub-characteristic of: [performance efficiency](#). Refer to [ISO 25010²¹](#) website.

Category: Quality, ISO 25010

²¹<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

Cardinality

Describes the quantitative rating of an association or relationship. It specifies the number of participants (objects, instances, modules etc) of the association.

Certification Program

The iSAQB(R) CPSA(R) certification program, including its organizational components, documents (training documents, contracts) and processes.

The copyrighted abbreviation and term CPSA(R) means *Certified Professional for Software Architecture*.

CIA Triad

See [Security Goals](#)

Category: Security

Cloud

“Cloud computing is a model for enabling ubiquitous, convenient, on-demand network access to a shared pool of configurable computing resources (e.g., networks, servers, storage, applications, and services) that can be rapidly provisioned and released with minimal management effort or service provider interaction.”

Definition quoted from [NIST²²](#) (National Institute of Standards and Technology).

The NIST definition contains the following five characteristics (quoted but abbreviated from the aforementioned NIST source too):

- On-demand self service: A consumer can unilaterally provision computing capabilities, such as server time and network storage, without requiring human interaction with each service provider.
- Broad network access: Capabilities are available over the network and accessed through standard mechanisms that promote use by heterogeneous client platforms.
- Resource pooling: The provider’s computing resources are pooled to serve multiple consumers using a multi-tenant model, with different physical and virtual resources dynamically assigned and reassigned according to consumer demand. There is location independence in that the customer generally has no control or knowledge over the exact location of the provided resources but may be able to specify location at a higher level of abstraction (e.g., country, state, or datacenter). Examples of resources include storage, processing, memory, and network bandwidth.
- Rapid elasticity: Capabilities can be elastically provisioned and released, in some cases automatically, to scale rapidly commensurate with demand. To the consumer, the capabilities available for provisioning often appear to be unlimited and can be appropriated in any quantity at any time.

²²<http://nvlpubs.nist.gov/nistpubs/Legacy/SP/nistspecialpublication800-145.pdf>

- **Measured service:** Cloud systems automatically control and optimize resource use by leveraging a metering capability at some level of abstraction appropriate to the type of service (e.g., storage, processing, bandwidth, and active user accounts). Resource usage can be monitored, controlled, and reported, providing transparency for both the provider and consumer of the utilized service.

Cohesion

The degree to which elements of a building block, component or module belong together. It measures the strength of relationship between pieces of functionality within a given component. In cohesive systems, functionality is strongly related. It is usually characterized as *high cohesion* or *low cohesion*. Strive for high cohesion, because high cohesion often implies reusability, low coupling and understandability.

Command

Design pattern in which an object is used to encapsulate an action. This action might be invoked or executed at a later time.

Common Closure Principle

A fundamental principle for designing the structure of software systems (also see [Package Principles](#)). It directly and explicitly restates the [Single Responsibility Principle](#) for larger components.

The subcomponents of a component should ideally have the exact same reasons to change. A change request that effects one of them should effect all of them, but it should *not* effect anything else outside their enclosing component.

Thereby, each expected change request would effect a minimal number of components. Or put another way: Each component would be [closed](#) to a maximum number of expected change requests. The term *expected* here signifies a few important implications:

1. The inherent concepts/responsibilities of a system run deeper than a surface-level description of its behaviour.
2. The deeper concepts/responsibilities of a system are not entirely objective but can be modeled in different ways.
3. Determining the concepts/responsibilities of a system is not just passive describing but also active *strategizing*.

This principle leads to [highly cohesive](#) components. It also implies [loosely coupled](#) components because related concepts that *do* change together *do* get bundled up in the same component. When each single concept is expressed by a single component, there are no unnecessary couplings between components.

Category: Design-Principle

Common Reuse Principle

A fundamental principle for designing the structure of software systems (also see [Package Principles](#)). The subcomponents (classes) of a component should be exactly the ones that are being (re)used together. Or the other way around: Components that are being (re)used together should be packaged into a larger component. This also implies that subcomponents that are *not* frequently used in conjunction with the other subcomponents should *not* be in the respective component.

This perspective helps in deciding what belongs into a component and what doesn't. It aims at a system decomposition of [loosely coupled](#) and [highly cohesive](#) components.

This obviously echoes the [Single Responsibility Principle](#). It also echoes the [Interface Segregation Principle](#), as it ensures that clients aren't forced to depend on concepts they don't care about.

Category: Design-Principle

Compatibility Quality Attribute

Degree to which a product, system or component can exchange information with other products, systems or components, and/or perform its required functions, while sharing the same hardware or software environment. Is composed of the following sub-characteristics: [co-existence](#), [interoperability](#). Refer to [ISO 25010](#)²³ website.

Category: Quality, ISO 25010

Complexity

“Complexity is generally used to characterize something with many parts where those parts interact with each other in multiple ways.” (quoted from Wikipedia.)

- *Essential* complexity is the core of the problem we have to solve, and it consists of the parts of the software that are legitimately difficult problems. Most software problems contain some complexity.
- *Accidental* complexity is all the stuff that doesn't necessarily relate directly to the solution, but that we have to deal with anyway.

(quoted from [Mark Needham](#)²⁴)

Architects shall strive to reduce accidental complexity.

Component

See [Building block](#). Structural element of an architecture.

²³<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

²⁴<http://codebetter.com/markneedham/2010/03/18/essential-and-accidental-complexity/>

Composition

Combine simpler elements (e.g. functions, data types, building blocks) to build more complicated, powerful or more responsible ones.

In UML: When the owning element is destroyed, so are the contained elements.

Concept

Plan, principle(s) or rule(s) how to solve a specific problem.

Concepts are often *crosscutting* in a sense that multiple architectural elements might be affected by a single concept. That means that implementors of e.g. implementation units (building blocks) should adhere to the corresponding concept.

Concepts form the basis for *conceptual integrity*.

Concern

“A *concern* about an architecture is a requirement, an objective, a constraint, an intention, or an aspiration a stakeholder has for that architecture.” (quoted from [Rozanski+11], chapter 8)

Following ISO/IEC/IEEE 42010 a concern is defined as (system) interest in a system relevant to one or more of its stakeholders (as defined in ISO/IEC/IEEE 42010).

Note, a concern pertains to any influence on a system in its environment, including developmental, technological, business, operational, organizational, political, economic, legal, regulatory, ecological and social influences.

Category: ISO-IEC-IEEE-42010

Confidentiality

One of the basic [Security Goals](#) describing a system to disclose and make information only available to authorized parties.

Category: Security

Confidentiality Quality Attribute

Degree to which a product or system ensures that data are accessible only to those authorized to have access. Is a sub-characteristic of: [security](#). Refer to [ISO 25010²⁵](#) website.

Category: Quality, ISO 25010

²⁵<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

Constraint

A restriction on the degree of freedom you have in creating, designing, implementing or otherwise providing a solution. Constraints are often *global requirements*, such as limited development resources or a decision by senior management that restricts the way you plan, design, develop or operate a system.

Based upon a [definition from Scott Ambler²⁶](#)

Context (of a system)

“Defines the relationships, dependencies, and interactions between the system and its environment: People, systems, and external entities with which it interacts.” (quoted from [Rozanski-Woods²⁷](#))

Context View

Shows the complete system as one [blackbox](#) within its environment, either from a business perspective (*business context*) or from a technical or deployment perspective (*technical context*). The context view (or context diagram) shows the boundary between a system and its environment, showing the entities in its environment (its neighbors) with which it interacts.

Neighbors can either be other software, hardware (like sensors), humans, user-roles or even organizations using the system.

See [Context](#).

Co-Existence Quality Attribute

Degree to which a product can perform its required functions efficiently while sharing a common environment and resources with other products, without detrimental impact on any other product. Is a sub-characteristic of: [compatibility](#). Refer to [ISO 25010²⁸](#) website.

Category: Quality, ISO 25010

Correspondence

A correspondence defines a relation between architectural description elements. Correspondences are used to express architecture relations of interest within an architecture description (or between architecture descriptions) (as defined in ISO/IEC/IEEE 42010).

Category: ISO-IEC-IEEE-42010

²⁶<http://agilemodeling.com/artifacts/constraint.htm>

²⁷<http://www.viewpoints-and-perspectives.info/home/viewpoints/context/>

²⁸<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

Correspondence rule

Correspondences can be governed by correspondence rules. Correspondence rules are used to enforce relations within an architecture description (or between architecture descriptions) (as defined in ISO/IEC/IEEE 42010).

Category: ISO-IEC-IEEE-42010

Consistency

A consistent systems does not contain contradictions.

- Identical problems are solved with identical (or at least similar) approaches.
- Degree, to which data and their relations comply to validation rules.
- Clients (of a database) get identical results for identical queries (e.g. Monotonic-Read-Consistency, Montonic-Write-Consistency, Read-Your-Writes-Consistency etc.)
- With respect to behavior: Degree, to which a system behaves coherent, replicable and reasonable.

Synonym: [Integrity](#), homogeneity, conceptual integrity.

Coupling

Coupling is the kind and degree of *interdependence* between building blocks of software; a measure of how closely connected two components are. You should always aim for *low* coupling. Coupling is usually contrasted with *cohesion*. Low coupling often correlates with high cohesion, and vice versa. Low coupling is often a sign of a well-structured system. When combined with high cohesion, it supports understandability and maintainability.

CPSA(R)

Certified Professional for Software Architecture(R) – the common name for different levels of certification issued by the [iSAQB](#). The most common known certifications are the foundation level (CPSA-F) and the advanced level (CPSA-A).

CQRS

(command query responsibility segregation): Separate the elements manipulating (*command*) data from those just reading (*query*). This separation enables different optimization strategies for reading and writing data (for example, it's much easier to cache data that's read-only than to cache data that's also altered.)

There's an interesting [eBook by Mark Nijhof](#)²⁹ on this subject.

²⁹<https://leanpub.com/cqrs>

Crosscutting concept

See [concept](#).

Synonym: principle, rule.

Crosscutting concern

Functionality of the architecture or system that affects several elements. Examples of such concerns are logging, transactions, security, exception handling, caching etc.

See also [concept](#).

Cyclomatic complexity

Quantitative measure, number of independent paths through a program's source code. It roughly correlates to the number of conditional statements (`if`, `while`) in the code +1. A linear sequence of statements without `if` or `while` has the cyclomatic complexity of 1. Many software engineers believe that higher complexity correlates to the number of defects.

Category: Metric.

Decomposition

(syn: factoring) Breaking or dividing a complex system or problem into several smaller parts that are easier to understand, implement or maintain.

Dependency

See [coupling](#).

Dependency Injection (DI)

Instead of having your objects or a factory creating a dependency, you pass the needed dependencies to the constructor or via property setters. You therefore make the creation of specific dependencies *somebody else's problem*.

Dependency Inversion Principle

High level (abstract) elements should not depend upon low level (specific) elements. "Details should depend upon abstractions" (Martin-2003). One of the [SOLID principles](#), nicely explained by [Brett Schuchert](#)³⁰, and closely related to the [SDP](#) and [SAP](#).

³⁰<http://martinfowler.com/articles/dipInTheWild.html>

Deployment

Bring software onto its execution environment (hardware, processor etc). Put software into operation.

Deployment view

Architectural view showing the technical infrastructure where a system or artifacts will be deployed and executed.

“This view defines the physical environment in which the system is intended to run, including the hardware environment your system needs (e.g., processing nodes, network interconnections, and disk storage facilities), the technical environment requirements for each node (or node type) in the system, and the mapping of your software elements to the runtime environment that will execute them.” (as defined by [Rozanski+2011](#)³¹)

Design pattern

General or generic reusable solution to a commonly occurring problem within a given context in design. Initially conceived by the famous architect [Christopher Alexander](#)³², the concept of *design patterns* was taken up by software engineers.

In our opinion, every serious software developer should know at least some patterns from the pioneering [Gang-of-Four](#)³³ book by Erich Gamma ([Gamma+1994](#)) and his three allies.

Design principle

Set of guidelines that helps software developers to design and implement better solutions, where “better” means the avoidance of the following three *bad characteristics*:

- **Rigidity:** A system or element is difficult to change because every change potentially affects many other elements.
- **Fragility:** When elements are changed, unexpected results, defects or otherwise negative consequences occur at other elements.
- **Immobility:** An element is difficult to reuse because it cannot be disentagled from the rest of the system.

These characteristics have been formulated by Robert Martin, quoted from [OODesign.com](#)³⁴

Document

A (usually written) artifact conveying information.

³¹<http://www.viewpoints-and-perspectives.info/home/viewpoints/deployment/>

³²https://en.wikipedia.org/wiki/Christopher_Alexander

³³https://en.wikipedia.org/wiki/Design_Patterns

³⁴<http://www.oodesign.com/design-principles.html>

Documentation

A systematically ordered collection of documents and other material of any kind that makes usage or evaluation easier. Examples for “other material”: presentation, video, audio, web page, image, etc.

Documentation Build

Automatic build process that collects artifacts into a consistent documentation.

Domain-Driven Design (DDD)

“Domain-driven design (DDD) is an approach to developing software for complex needs by deeply connecting the implementation to an evolving model of the core business concepts.” (quoted from [DDDCommunity](#)³⁵). See [Evans-2004](#).

See also:

- [Entity](#)
- [Value Object](#)
- [Aggregate](#)
- [Service](#)
- [Factory](#)
- [Repository](#)
- [Ubiquitous Language](#)

Domain model

The domain model is a concept of [Domain-Driven Design](#). The domain model is a system of abstractions that describes selected aspects of a domain and can be used to solve problems related to that domain.

Drawing Tool

A tool to create drawings that can be used in architecture documentation. Example: Visio, OmniGraffle, PowerPoint, etc. Drawing tools treat each drawing as a separate thing, this causes maintenance overhead when updating an element of the architecture that is shown in several diagrams (as opposed to a [Modeling Tool](#)).

Economicalness

Embedded system

System *embedded* within a larger mechanical or electrical system. Embedded systems often have real-time computing constraints. Typical properties of embedded systems are low power consumption, limited memory and processing resources, small size.

³⁵http://dddcommunity.org/learning-ddd/what_is_ddd/

Encapsulation

Encapsulation has two slightly distinct notions, and sometimes to the combination thereof:

- restricting access to some of the object's components
- bundling of data with the methods or functions operating on that data

Encapsulation is a mechanism for [information hiding](#).

Enterprise IT Architecture

Synonym: Enterprise Architecture.

Structures and concepts for the IT support of an entire company. Atomic subject matters of the enterprise architecture are single software systems also referred to as „applications“.

Entity

Category: DDD

Entity is a building block of [Domain-Driven Design](#). An entity is a core object of a business domain with unchangeable identity and a clearly defined lifecycle. Entities map their state to [value objects](#) and are almost always persistent.

Entropy

In information theory defined as “amount of information” a message has or “unpredictability of information content”. The entropy of a cryptosystem is measured by the size of the keyspace. Larger keyspaces have an increased entropy and if not flawed by the algorithm itself, harder to break than smaller ones. For secure cryptographic operations it is mandatory to not only use random values as input, they should have also a high entropy. The creation of high entropy on a computer system is non-trivial and can affect the performance of a system.

See [11.1 Information Theory of Schneier-1996](#) and Whitewood Inc. on “[Understanding and Managing Entropy](#)”³⁶ or SANS “[Randomness and Entropy - An Introduction](#)”³⁷.

Category: Security

Environment

(System) Context determining the setting and circumstances of all influences upon a system (as defined in ISO/IEC/IEEE 42010).

Note, the environment of a system includes developmental, technological, business, operational, organizational, political, economic, legal, regulatory, ecological and social influences.

Category: ISO-IEC-IEEE-42010

³⁶<https://www.blackhat.com/docs/us-15/materials/us-15-Potter-Understanding-And-Managing-Entropy-Usage-wp.pdf>

³⁷<https://www.sans.org/reading-room/whitepapers/vpns/randomness-entropy-introduction-874>

Facade

Structural design pattern. A Facade offers a simplified interface to a complex or complicated building block (the *provider*) without any modifications to the provider.

Factory

(Design pattern) In class-based or object-oriented programming, the factory method pattern is a creational design pattern that uses factory methods or factory components for creating objects, without having to specify the exact class of the object that will be created.

In **Domain-Driven Design**: A factory encapsulates the creation of **aggregates**, **entities**, and **value objects**. Factories work exclusively in the domain and have no access to technical building blocks (e.g. a database).

Fault Tolerance Quality Attribute

Degree to which a system, product or component operates as intended despite the presence of hardware or software faults. Is a sub-characteristic of: **reliability**. Refer to [ISO 25010³⁸](#) website.

Category: Quality, ISO 25010

Filter

Part of the pipe-and-filter architectural style that creates or transforms data Filters typically execute independent from other filters.

Fundamental Modeling Concepts (FMC)

Graphical notation for modeling and documenting software systems. From their website: “FMC provide a framework for the comprehensive description of software-intensive systems. It is based on a precise terminology and supported by a graphical notation which can be easily understood”.

Functional Appropriateness Quality Attribute

Degree to which the functions facilitate the accomplishment of specified tasks and objectives. Is a sub-characteristic of: **functional suitability**. Refer to [ISO 25010³⁹](#) website.

Category: Quality, ISO 25010

Functional Completeness Quality Attribute

Degree to which the set of functions covers all the specified tasks and user objectives. Is a sub-characteristic of: **functional suitability**. Refer to [ISO 25010⁴⁰](#) website.

Category: Quality, ISO 25010

³⁸<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

³⁹<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

⁴⁰<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

Functional Correctness Quality Attribute

Degree to which a product or system provides the correct results with the needed degree of precision. Is a sub-characteristic of: [functional suitability](#). Refer to [ISO 25010⁴¹](#) website.

Category: Quality, ISO 25010

Functional Suitability Quality Attribute

Degree to which a product or system provides functions that meet stated and implied needs when used under specified conditions. Is composed of the following sub-characteristics: [functional completeness](#), [functional correctness](#), [functional appropriateness](#). Refer to [ISO 25010⁴²](#) website.

Category: Quality, ISO 25010

Gateway

A (design or architecture) pattern: An element of that encapsulates access to a (usually external) system or resource. See also [wrapper](#), [adapter](#).

Global analysis

Systematic approach to achieve desired quality attributes. Developed and documented by Christine Hofmeister (Siemens Corporate Research). Global analysis is described in [Hofmeister+2000].

Heterogeneous architectural style

see *hybrid architecture style*.

Heuristic

Informal rule, rule-of-thumb. Any way of problem solving not guaranteed to be optimal, but somehow sufficient. Examples from [Object-Oriented Design⁴³](#) or [User Interface Design⁴⁴](#).

Hybrid architecture style

Combination of two or more existing architecture styles or patterns. For example, an MVC construct embedded in a layer structure.

⁴¹<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

⁴²<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

⁴³http://www.vincehuston.org/ood/oo_design_heuristics.html

⁴⁴<https://www.nngroup.com/articles/ten-usability-heuristics/>

IEEE-1471

Standard *Recommended Practice for Architectural Description of Software-Intensive Systems*, defined as ISO/IEC 42010:2007. Defines a (abstract) framework for the description of software architectures.

Incremental development

see *iterative and incremental development*.

Information Hiding

A fundamental principle in software design: Keep those design or implementation decisions *hidden* that are likely to change, thus protecting other parts of the system from modification if these decisions or implementations are changed. Is one important attributes of [blackboxes](#). Separates interface from implementation.

The term [encapsulation](#) is often used interchangeably with information hiding.

Installability Quality Attribute

Degree of effectiveness and efficiency with which a product or system can be successfully installed and/or uninstalled in a specified environment. Is a sub-characteristic of: [portability](#). Refer to [ISO 25010⁴⁵](#) website.

Category: Quality, ISO 25010

Integrity

Various meanings:

Category: Security

One of the basic [Security Goals](#) which means maintaining and assuring accuracy and completeness of data. Usually this is achieved by the usage of cryptographic algorithms to create a digital signature.

Category: Fundamental

Data or behavioral integrity: * Degree to which clients (of a database) get identical results for identical queries (e.g. Monotonic-Read-Consistency, Montonic-Write-Consistency, Read-Your-Writes-Consistency etc.) * Degree, to which a system behaves coherent, replicable and reasonable.

See also [consistency](#).

⁴⁵<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

Integrity Quality Attribute

Degree to which a system, product or component prevents unauthorized access to, or modification of, computer programs or data. Is a sub-characteristic of: [security](#). Refer to [ISO 25010⁴⁶](#) website.

Category: Quality, ISO 25010, Security

Interface

Boundary across which two building blocks interact or communicate with each other.

Interface Segregation Principle (ISP)

Building blocks (classes, components) should not be forced to depend on methods they don't use. ISP splits larger interfaces into smaller and more (client) specific ones so that clients will only need to know about methods that they actually use.

Interoperability Quality Attribute

Degree to which two or more systems, products or components can exchange information and use the information that has been exchanged. Is a sub-characteristic of: [compatibility](#). Refer to [ISO 25010⁴⁷](#) website.

Category: Quality, ISO 25010

iSAQB

international Software Architecture Qualification Board – an internationally active organization fostering the development of software architecture education. See also the discussion in the [appendix](#).

ISO 9126

(Deprecated) standard to describe (and evaluate) *software product quality*. Has been superseded by [ISO 25010](#), see below.

ISO 25010

Standards to describe (and evaluate) *software product quality*. “The quality model determines which quality characteristics will be taken into account when evaluating the properties of a software product.” (quote from the [ISO website⁴⁸](#))

For a list of quality attributes defined by the ISO 25010 standard, refer to [ISO 25010](#)

⁴⁶<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

⁴⁷<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

⁴⁸<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

Iterative development

“Development approach that *cycles* through development phases, from gathering requirements to delivering functionality in a working release.” (quoted from [c2-wiki](#)⁴⁹).

Such cycles are repeated to improve either functionality, quality or both.

Contrast to the *Waterfall development*.

Iterative and incremental development

Combination of iterative and incremental approaches for software development. These are essential parts of the various *agile* development approaches, e.g. Scrum and XP.

Kerckhoffs' Principle

One of the six cryptographic axioms described 1883 in an article “La cryptographie militaire” by the dutch cryptographer and linguist Auguste Kerckhoffs. This axiom is still relevant today and therefore referred to as “Kerckhoffs' Principle”.

It describes that a cryptographic method must not need to be kept secret in order to achieve the security of the encrypted messages.

“The enemy knows the system” is another expression coined by the mathematician Claude Shannon as Shannon's Maxim.

See [Bruce Schneiers Crypto-Gram, May 15, 2002](#)⁵⁰

Category: Security

Layer

Grouping of building blocks or components that (together) offer a cohesive set of services to other layers. Layers are related to each other by the ordered relation *allowed to use*.

Learnability Quality Attribute

Degree to which a product or system can be used by specified users to achieve specified goals of learning to use the product or system with effectiveness, efficiency, freedom from risk and satisfaction in a specified context of use. Is a sub-characteristic of: [usability](#). Refer to [ISO 25010](#)⁵¹ website.

Category: Quality, ISO 25010

⁴⁹<http://c2.com/cgi/wiki?IterativeDevelopment>

⁵⁰<https://www.schneier.com/crypto-gram/archives/2002/0515.html>

⁵¹<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

Liskov Substitution Principle

Refers to object oriented programming: If you use inheritance, do it right: Instances of derived types (subclasses) must be completely substitutable for their base types. If code uses a base class, these references can be replaced with any instance of a derived class without affecting the functionality of that code.

Maintainability Quality Attribute

Degree of effectiveness and efficiency with which a product or system can be modified to improve it, correct it or adapt it to changes in environment, and in requirements. Is composed of the following sub-characteristics: [modularity](#), [reusability](#), [analysability](#), [modifiability](#), [testability](#). Refer to [ISO 25010⁵²](#) website.

Category: Quality, ISO 25010

Maturity Quality Attribute

Degree to which a system, product or component meets needs for reliability under normal operation. Is a sub-characteristic of: [reliability](#). Refer to [ISO 25010⁵³](#) website.

Category: Quality, ISO 25010

MFA

For Multi-Factor-Authentication see [Authentication](#).

Category: Security

Microservice

An architectural style, proposing to divide large systems into small units. “Microservices have to be implemented as virtual machines, as more light-weight alternatives such as Docker containers or as individual processes. Thereby they can easily be brought into production individually.” (quoted from the (free) [LeanPub booklet on Microservices⁵⁴](#) by [Eberhard Wolff⁵⁵](#)).

Model Driven Architecture (MDA)

OMG-Standard for model based software development. Definition: „An approach to IT system specification that separates the specification of functionality from the specification of the implementation of that functionality on a specific technology platform.“

⁵²<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

⁵³<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

⁵⁴<https://leanpub.com/microservices-primer>

⁵⁵<http://microservices-book.com>

Model-driven software development (MDSD)

The underlying idea is to generate code from more abstract models of requirements or the domain.

Model kind

Conventions for a type of modeling (as defined in ISO/IEC/IEEE 42010).

Note, examples of model kinds include data flow diagrams, class diagrams, Petri nets, balance sheets, organization charts and state transition models.

Category: ISO-IEC-IEEE-42010

Modeling Tool

A tool that creates models (e.g. UML or BPMN models). Can be used to create consistent diagrams for documentation because it has the advantage that each model element exists only once but can be consistently displayed in many diagrams (as opposed to a mere [Drawing Tool](#)).

Model-View-Controller

Architecture pattern, often used to implement user interfaces. It divides a system into three interconnected parts (model, view and controller) to separate the following responsibilities:

- Model manages data and logic of the system. The “truth” that will be shown or displayed by one or many views. Model does not know (depend on) its views.
- View can be any number of (arbitrary) output representation of (model) information. Multiple views of the same model are possible.
- Controller accepts (user) input and converts those to commands for the model or view.

Modifiability Quality Attribute

Degree to which a product or system can be effectively and efficiently modified without introducing defects or degrading existing product quality. Is a sub-characteristic of: [maintainability](#). Refer to [ISO 25010⁵⁶](#) website.

Category: Quality, ISO 25010

Modularity Quality Attribute

Degree to which a system or computer program is composed of discrete components such that a change to one component has minimal impact on other components. Is a sub-characteristic of: [maintainability](#). Refer to [ISO 25010⁵⁷](#) website.

Category: Quality, ISO 25010

⁵⁶<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

⁵⁷<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

Module

(see also [Modular programming](#))

1. structural element or building block, usually regarded as a *black box* with a clearly defined responsibility. It encapsulates data and code and provides public interfaces, so clients can access its functionality. This meaning has first been described in a groundbreaking and fundamental paper from David L. Parnas: [On the Criteria to be Used in Decomposing Software into Modules](#)⁵⁸
2. In several programming languages, *module* is a construct for aggregating smaller programming units, e.g. in Python. In other languages (like Java), modules are called *packages*.
3. The CPSA(R)-Advanced Level is currently divided into several modules, which can be learned or taught separately and in any order. The exact relationships between these modules and the contents of these modules are defined in the respective curricula.

Modular programming

“Software design technique that separates the functionality of a program into independent, interchangeable *modules*, so that each module contains everything necessary to execute only one aspect of the desired functionality.

Module have *interfaces* expressing the elements provided and required by the module. The elements defined in the interface are detectable by other modules.” (quoted from [Wikipedia](#)⁵⁹)

Node (in UML)

A processing resource (execution environment, processor, machine, virtual machine, application server) where artifacts can be deployed and executed.

Node (Node.js)

In modern web development: Short form for the open source JavaScript runtime [Node.js](#)⁶⁰, which is built on Chrome’s V8 JavaScript engine. Node.js is famous for its an event-driven, non-blocking I/O model and its vast ecosystem of supporting libraries.

Non Functional Requirement (NFR)

Requirements that *constrain the solution*. Nonfunctional requirements are also known as *quality attribute requirements* or *quality requirements*. The term NFR is actually misleading, as many of the *attributes* involved directly relate to specific system *functions* (so modern requirements engineering likes to call these things *required constraints*).

⁵⁸<http://www.cs.umd.edu/class/spring2003/cmsc838p/Design/criteria.pdf>

⁵⁹https://en.wikipedia.org/wiki/Modular_programming

⁶⁰<https://nodejs.org/en/>

Non-repudiation Quality Attribute

Degree to which actions or events can be proven to have taken place, so that the events or actions cannot be repudiated later. Is a sub-characteristic of: [security](#). Refer to [ISO 25010⁶¹](#) website.

Category: Quality, ISO 25010

Notation

A system of marks, signs, figures, or characters that is used to represent information. Examples: prose, table, bullet point list, numbered list, UML, BPMN.

Observer

(Design pattern) "... in which an object maintains a list of its dependents, called observers, and notifies them automatically of any state changes, usually by calling one of their methods. The Observer pattern is a key part in the model-view-controller (MVC) architectural pattern". (quoted from [Wikipedia⁶²](#))

Open-Close-Principle (OCP)

„Software entities (classes, modules, functions, etc.) should be open for extension, but closed for modification“ (Bertrand Meyer, 1998). In plain words: To *add* functionality (extension) to a system, you should *not need to modify* existing code. Part of Robin Martins “SOLID” principles for object-oriented systems. Can be implemented in object oriented languages by interface inheritance, in a more general way as *plugins*.

Operability Quality Attribute

Degree to which a product or system has attributes that make it easy to operate and control. Is a sub-characteristic of: [usability](#). Refer to [ISO 25010⁶³](#) website.

Category: Quality, ISO 25010

OWASP

The **Open Web Application Security Project** is a worldwide non-profit online organization founded 2001 for improving the security of software. It is a rich source for information and best practices in the field of web security. See <https://www.owasp.org/>⁶⁴.

The OWASP-Top-10 is a frequently referenced list of attack categories based on the projects data survey.

Category: Security

⁶¹<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

⁶²https://en.wikipedia.org/wiki/Observer_pattern

⁶³<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

⁶⁴<https://www.owasp.org/>

Package Principles

Fundamental principles for designing the structure of software systems ([Martin-2003](#)):

- [Reuse/Release Equivalence Principle \(REP\)](#)
- [Common Reuse Principle \(CRP\)](#)
- [Common Closure Principle \(CCP\)](#)
- [Acyclic Dependencies Principle \(ADP\)](#)
- [Stable Dependencies Principle \(SDP\)](#)
- [Stable Abstractions Principle \(SAP\)](#)

Robert C. Martin, who coined the “[SOLID](#)” acronym, also [introduced the Package Principles](#)⁶⁵ and frequently reiterated both in conjunction. Whereas the SOLID Principles target the level of classes, the Package Principles target the level of larger components that contain multiple classes and might get deployed independently.

Package- and SOLID Principles share the explicit goal of keeping software [maintainable](#) and avoiding the symptoms of degraded design: rigidity, fragility, immobility, and viscosity.

While Martin expressed the Package Principles in terms of large-scale components, they apply at other scales as well. Their core are universal principles like low coupling, high cohesion, single responsibility, hierarchical (acyclic) decomposition, and the insight that meaningful dependencies go from specific/unstable concepts to more abstract/stable ones (which echoes the [DIP](#)).

Category: Design-Principle

Pattern

A reusable or repeatable solution to a common problem in software design or architecture.

See [architecture pattern](#) or [design pattern](#).

Perfect Forward Secrecy

Property of a cryptographic protocol where an attacker can't gain any information about short-term session keys by compromising long-term keys.

Examples for protocols with perfect forward secrecy are TLS and OTR. If this feature is enabled for [TLS](#) and an attacker gains access to a server's private key, previously recorded communication sessions can still not be decrypted.

Category: Security

⁶⁵[\[RobertC.Martin\]\(http://butunclebob.com/ArticleS.UncleBob.PrinciplesOfOod\)](#)

Performance Efficiency Quality Attribute

Performance relative to the amount of resources used under stated conditions.

Resources can include other software products, the software and hardware configuration of the system, and materials (e.g. print paper, storage media).

Is composed of the following sub-characteristics: [time behaviour](#), [resource utilization](#), [capacity](#).

Refer to [ISO 25010⁶⁶](#) website.

Category: Quality, ISO 25010

Perspective

A perspective is used to consider a set of related quality properties and concerns of a system.

Architects apply perspectives iteratively to the system's *architectural views* in order to assess the effects of *architectural design decisions* across multiple *viewpoints* and *architectural views*.

[Rozanski+11] associates with the term *perspective* also activities, tactics, and guidelines that must be considered if a system should provide a set of related quality properties and suggests the following perspectives:

- Accessibility
- Availability and Resilience
- Development Resource
- Evolution
- Internationalization
- Location
- Performance and Scalability
- Regulation
- Security
- Usability

Pikachu

A yellowish mouse-like character from the (quite famous) [Pokémon world⁶⁷](#). Actually, you don't need to know that. But it does not hurt either - and you might impress your kids with this knowledge...

Pipe

Connector in the pipes-and-filters architectural style that transfers streams or chunks of data from the output of one filter to the input of another filter without modifying values or order of data.

⁶⁶<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

⁶⁷<https://simple.wikipedia.org/wiki/Pikachu>

PKI

Short for **Public-Key-Infrastructure**. A concept of managing digital certificates usually involving [asymmetric cryptography](#). The term “public” refers most of the time to the used type of cryptographic key and not necessarily to infrastructure open to a public audience. To prevent semantic confusion the terms “open PKI” or “closed PKI” can be used, see [Anderson, Chapter 21.4.5.7 PKI, page 672](#).

PKI is usually based on a [CA](#) or a [Web-of-Trust](#).

Category: Security

Port

UML construct, used in component diagrams. An interface, defining a point of interaction of a component with its environment.

Portability Quality Attribute

Degree of effectiveness and efficiency with which a system, product or component can be transferred from one hardware, software or other operational or usage environment to another. Is composed of the following sub-characteristics: [adaptability](#), [installability](#), [replaceability](#). Refer to [ISO 25010⁶⁸](#) website.

Category: Quality, ISO 25010

POSA

Pattern-oriented Software Architecture. Series of books on software architecture patterns.

Principal

Principals in a security context are entities which have been authenticated and can be assigned permissions to. A principal can be a user but for example also other services or a process running on a system. The term is used in the [Java environment⁶⁹](#) and throughout different authentication protocols (see [GSSAPI RFC2744⁷⁰](#) or [Kerberos RFC4121⁷¹](#)).

Category: Security

⁶⁸<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

⁶⁹<https://docs.oracle.com/javase/8/docs/api/java/security/Principal.html>

⁷⁰<https://tools.ietf.org/html/rfc2744>

⁷¹<https://tools.ietf.org/html/rfc4121>

Proxy

(Design pattern) “A wrapper or agent object that is being called by the client to access the real serving object behind the scenes. Use of the proxy can simply be forwarding to the real object, or can provide additional logic. In the proxy extra functionality can be provided, for example caching when operations on the real object are resource intensive, or checking preconditions before operations on the real object are invoked. For the client, usage of a proxy object is similar to using the real object, because both implement the same interface.” (quoted from [Wikipedia⁷²](#))

Pseudo-Randomness

Often used in conjunction with pseudo-random-number-generators. Gathering randomness with a high [entropy](#) is resource intensive and usually not required by many applications, cryptography left aside. To address this issue pseudo-random-generators are initialized with a seed of data and create random values based on this seed. The data will be generated by random, but will always be the same if the generator is initialized with an identical seed. This is called pseudo-randomness and is less performance intensive.

Category: Security

Qualitative evaluation

Finding risks concerning the desired quality attributes of a system. Analyzing or assessing if a system or its architecture can meet the desired or required quality goals.

Instead of calculating or measuring certain characteristics of systems or architectures, qualitative evaluation is concerned with risks, tradeoffs and sensitivity points.

See also [assessment](#).

Quality

see [software quality](#) and [quality attributes](#).

Quality attribute

Software quality is the degree to which a system possesses the desired combination of *attributes* (see: [software quality](#)).

The Standard [ISO-25010](#) defines the following quality attributes: - [Functional suitability](#) - [Functional completeness](#) - [Functional correctness](#) - [Functional appropriateness](#) - [Performance efficiency](#) - [Time behaviour](#) - [Resource utilization](#) - [Capacity](#) - [Compatibility](#) - [Co-existence](#) - [Interoperability](#) - [Usability](#) - [Appropriateness recognizability](#) - [Learnability](#) - [Operability](#) - [User error protection](#) - [User interface aesthetics](#) - [Accessibility](#) - [Reliability](#) - [Availability](#) - [Fault tolerance](#) - [Recoverability](#) - [Security](#) - [Confidentiality](#) - [Integrity](#) - [Non-repudiation](#) - [Accountability](#) - [Authenticity](#) - [Maintainability](#) - [Modularity](#) - [Reusability](#) - [Analysability](#) - [Modifiability](#) - [Testability](#) - [Portability](#) - [Adaptability](#) - [Installability](#) - [Replaceability](#)

It's helpful to distinguish between:

⁷²https://en.wikipedia.org/wiki/Proxy_pattern

- *runtime quality attributes* (which can be observed at execution time of the system),
- non-runtime quality attributes_ (which cannot be observed as the system executes) and
- business quality attributes (cost, schedule, marketability, appropriateness for organization)

Examples of runtime quality attributes are functional suitability, performance efficiency, security, reliability, usability and interoperability.

Examples of non-runtime quality attributes are modifiability, portability, reusability, integratability, and testability.

Quality characteristic

synonym: *quality attribute*.

Quality Model

(from ISO 25010) A model that defines quality characteristics that relate to static properties of software and dynamic properties of the computer system and software products. The quality model provides consistent terminology for specifying, measuring and evaluating system and software product quality.

The scope of application of the quality models includes supporting specification and evaluation of software and software-intensive computer systems from different perspectives by those associated with their acquisition, requirements, development, use, evaluation, support, maintenance, quality assurance and control, and audit.


Quality requirement

Characteristic or attribute of a component of a system. Examples include runtime performance, safety, security, reliability or maintainability. See also *software quality*.

Quality tree

(syn: quality attribute utility tree). A hierarchical model to describe product quality: The root “quality” is hierarchically refined in *areas* or topics, which itself are refined again. Quality scenarios form the leaves of these tree.

- Standards for product quality, like [ISO 25010](#term-iso-25010), propose *generic* quality trees.
- The quality of a specific system can be described by a *specific* quality tree (see the example below).

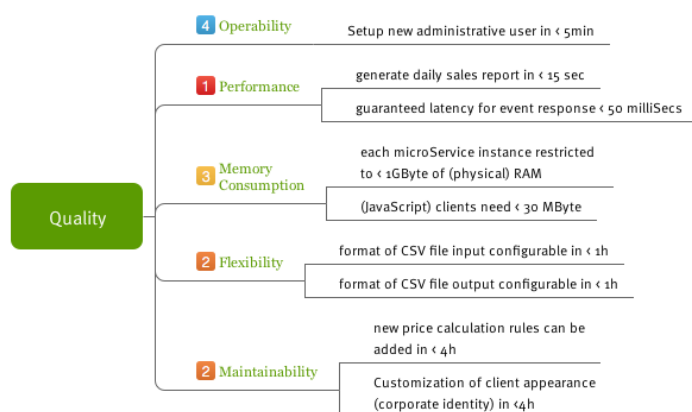

Sample Quality Tree

Quantitative evaluation

(syn: quantative analysis): Measure or count values of software artifacts, e.g. [coupling](#), cyclomatic complexity, size, test coverage. Metrics like these can help to identify critical parts or elements of systems.

Randomness

See [Entropy](#) or [Pseudo-Randomness](#).

Category: Security

Rationale

Explanation of the reasoning or arguments that lie behind an architecture decision.

RBAC (Role Based Access Control)

A role is a fixed set of permissions usually assigned to a group of [principals](#). This allows a **Role-Based-Access-Control** usually to be implemented more efficient than an [ACL](#) based system and makes for example deputy arrangements possible.

Category: Security

Recoverability Quality Attribute

Degree to which, in the event of an interruption or a failure, a product or system can recover the data directly affected and re-establish the desired state of the system. Is a sub-characteristic of: [reliability](#). Refer to [ISO 25010](#)⁷³ website.

Category: Quality, ISO 25010

⁷³<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

Redesign

The alteration of software units in such a way that they fulfill a similar purpose as before, but in a different manner and possibly by different means. Often mistakenly called refactoring.

Refactoring

A term denoting the improvement of software units by changing their internal structure without changing the behavior. (see “Refactoring is the process of changing a software system in such a way that it does not alter the external behavior of the code yet improves the internal structure.”

Refactoring, Martin Fowler, 1999

Not to be confused with *redesign*

Registry

“A well-known object that other objects can use to find common objects and services.” (quoted from [PoEAA](#)⁷⁴). Often implemented as a *Singleton* (also a well-known design pattern.)

Reliability Quality Attribute

Degree to which a system, product or component performs specified functions under specified conditions for a specified period of time. Is composed of the following sub-characteristics: [maturity](#), [availability](#), [fault tolerance](#), [recoverability](#). Refer to [ISO 25010](#)⁷⁵ website.

Category: Quality, ISO 25010

Relationship

Generic term denoting some kind of dependency between elements of an architecture. Different types of relationship are used within architectures, e.g. call, notification, ownership, containment, creation or inheritance.

Replaceability Quality Attribute

Degree to which a product can replace another specified software product for the same purpose in the same environment. Is a sub-characteristic of: [portability](#). Refer to [ISO 25010](#)⁷⁶ website.

Category: Quality, ISO 25010

Repository

In architecture documentation: A place where artifacts are stored before an automatic build process collects them into one consistent document. In [Domain-Driven Design](#): Repository is a building block of [Domain-Driven Design](#). A repository hides technical details of the infrastructure layer to the domain layer. Repositories return [entities](#) that are persisted in the database.

⁷⁴<http://martinfowler.com/eaCatalog/registry.html>

⁷⁵<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

⁷⁶<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

Resource Utilization Quality Attribute

Degree to which the amounts and types of resources used by a product or system, when performing its functions, meet requirements. Is a sub-characteristic of: [performance efficiency](#). Refer to [ISO 25010⁷⁷](#) website. Category: Quality, ISO 25010

Reusability Quality Attribute

Degree to which an asset can be used in more than one system, or in building other assets. Is a sub-characteristic of: [maintainability](#). Refer to [ISO 25010⁷⁸](#) website.

Category: Quality, ISO 25010

Reuse/Release Equivalence Principle

A fundamental principle for designing the structure of software systems (also see [Package Principles](#)). It demands that large components are “released” and under version control, in particular if the system uses them from multiple points. Even if we don’t release them publicly, we should extract such components from the system and provide them through an external dependency manager with proper version control.

The REP contains two different insights:

1. On the large scale, [modularity](#) and [low coupling](#) require more than type separation.
2. [Reusability](#) of components (even if all “reuse” is internal) translates to overall [maintainability](#).

Category: Design-Principle

RM/ODP

Reference Model for Open Distributed Processing. (Abstract) metamodel for documentation of information systems. Defined in ISO/IEC 10746.

Round-trip engineering

“Concept of being able to make any kind of change to a model as well as to the code generated from that model. The changes always propagate bidirectional and both artifacts are always consistent.” (quoted from [Wikipedia⁷⁹](#)).

⁷⁷<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

⁷⁸<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

⁷⁹https://en.wikipedia.org/wiki/Model-driven_software_development



Comment (Gernot Starke)

In my personal opinion, it does not work in practical situations, only in hello-world-like scenarios, as the inverse abstraction (from low-level sourcecode to higher-level architectural elements) usually involves design-decisions and cannot realistically be automated.

Comment (Matthias Bohlen)

Recently I have seen code that originated from DDD where reverse engineering did indeed work.

Ruby

A wonderful programming language.


Category: Programming

Runtime View

Shows the cooperation or collaboration of building blocks (respectively their instances) at runtime in concrete scenarios. Should refer to elements of the [Building Block View](#). Could for example (but doesn't need to) be expressed in UML sequence or activity diagrams.

Scenario

Quality scenarios document required quality attributes. They help to describe required or desired qualities of a system, in pragmatic and informal manner, yet making the abstract notion of "quality" concrete and tangible.

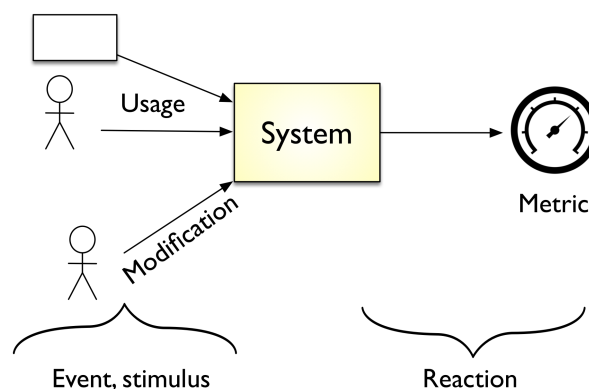

Generic form of (Quality) scenario

- Event/stimulus: Any condition or event arriving at the system
- System (or part of the system) is stimulated by the event.
- Response: The activity undertaken after the arrival of the stimulus.
- Metric (response measure): The response should be measurable in some fashion.

SDL

A **Secure-Development-Lifecycle** is a companies usual software development process with additional practices of engineering secure software. This involves for example code reviews, architectural risk analyses, black/whitebox and penetration testing and many more additions. The whole lifecycle of an application should be covered by the SDL, beginning with the first requirements engineering tasks and ending with feedback from operating the released software by fixing security issues.

See McGraw “An Enterprise Software Security Program”, page 239.

Category: Security

Security Goals

The goals are the key point of information security. They are a basic set of information attributes which can be fulfilled or not depending on a systems architecture and processes.

The most common agreed set of security goals is the so called “CIA triad”:

- Confidentiality
- Integrity
- Availability

The “Reference Model of Information Assurance and Security” (RIMAS) extends this list by Accountability, Auditability, Authenticity/Trustworthiness, Non-repudiation and Privacy.

These are typical examples for non-functional requirements related to security.

See “What is Security Engineering - Definitions”, page 11 or RMIAS.

Category: Security

Security Quality Attribute

Degree to which a product or system protects information and data so that persons or other products or systems have the degree of data access appropriate to their types and levels of authorization. Is composed of the following sub-characteristics: **confidentiality**, **integrity**, **non-repudiation**, **accountability**, **authenticity**. Refer to ISO 25010⁸⁰ website.

Category: Quality, ISO 25010

SCS (Self Contained System)

An architectural style, similar to **Microservices**. To quote from the site scs-architecture.org⁸¹:

“The Self-contained System (SCS) approach is an architecture that focuses on a separation of the functionality into many independent systems, making the complete system a collaboration of many smaller software systems. This avoids the problem of large monoliths that grow constantly and eventually become unmaintainable”

⁸⁰<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

⁸¹<http://scs-architecture.org/>

Sensitivity point

(in qualitative evaluation like ATAM): Element of the architecture or system influencing several quality attributes. For example, if one component is responsible for both runtime performance *and* robustness, that component is a sensitivity point.

Casually said, if you mess up a sensitivity point, you will most often have more than one problem.

Separation of concern (SoC)

Any element of an architecture should have exclusivity and singularity of responsibility and purpose: No element should share the responsibilities of another element or contain unrelated responsibilities.


Another definition is “breaking down a system into elements that overlap as little as possible.”

Famous Edgar Dijkstra said in 1974: “Separation of concerns ... even if not perfectly possible, is the only available technique for effective ordering of one’s thoughts”.

Similar to the [Single Responsibility Principle](#).

Sequence diagram

Type of diagram to illustrate how elements of an architecture interact to achieve a certain scenario. It shows the sequence (flow) of messages between elements. As parallel vertical lines it shows the lifespan of objects or components, horizontal lines depict interactions between these components. See the following example.

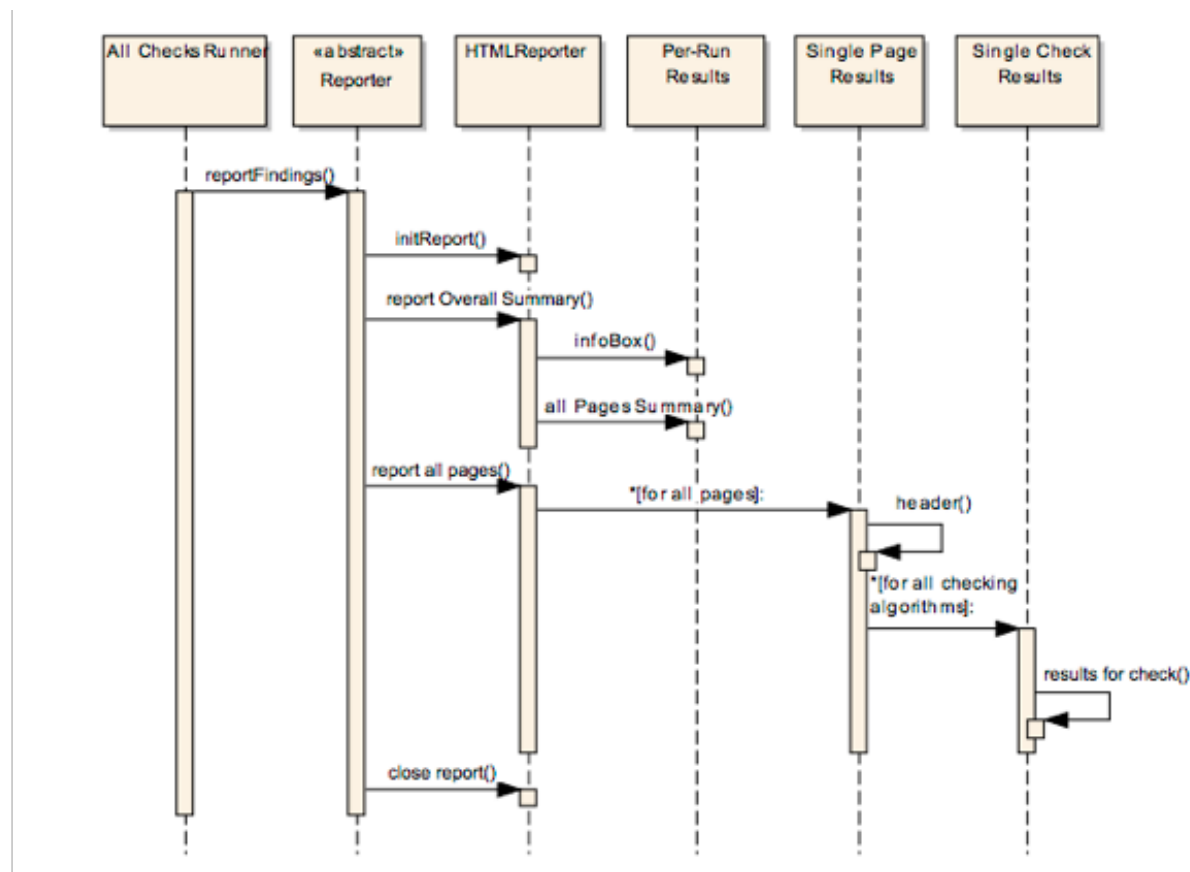

Example of Sequence Diagram

Service

t.b.d.

Service (DDD)

Service is a building block of [Domain-Driven Design](#). Services implement logic or processes of the business domain that are not executed by entities alone. A service is stateless and the parameters and return values of its operations are [entities](#), [aggregates](#) and [value objects](#).

Singleton

“Design pattern that restricts the instantiation of a class to one object. This is useful when exactly one object is needed to coordinate actions across the system.” (quoted from [Wikipedia](#)⁸²).

Single Responsibility Principle (SRP)

Each element within a system or architecture should have a single responsibility, and that all its functions or services should be aligned with that responsibility.

Cohesion is sometimes considered to be synonymous for SRP.

⁸²https://en.wikipedia.org/wiki/Singleton_pattern

Software Architecture

There exist several (!) valid and plausible definitions of the term *Software Architecture*.

The following definition has been proposed by the [IEEE 1471](#)⁸³ standard:

Software Architecture: the fundamental organization of a system embodied in its components, their relationships to each other and to the environment and the principles guiding its design and evolution.

The new standard ISO/IEC/IEEE 42010:2011 has adopted and revised the definition as follows:

Architecture: (system) fundamental concepts or properties of a system in its environment embodied in its elements, relationships, and in the principles of its design and evolution.

The key terms in this definition require some explanation:

- Components: Subsystems, modules, classes, functions or the more general term *building blocks*: structural elements of software: Components are usually implemented in a programming language, but can also be other artifacts that (together) *make up the system*.
- Relationships: Interfaces, dependencies, associations - different names for the same feature: Components need to interact with other components to enable *separation of concerns*.
- Environment: Every system has some relationships to its environment: data, control flow or events are transferred to and from maybe different kinds of neighbours.
- Principles: Rules or conventions that hold for a system or several parts of it. Decision or definition, usually valid for several elements of the system. Often called *concepts* or even *solution patterns*. Principles (concepts) are the foundation for *conceptual integrity*.

The *Software Engineering Institute* maintains a [collection of further definitions](#)⁸⁴

Category: ISO-IEC-IEEE-42010

Software Quality

(from IEEE Standard 1061): Software quality is the degree to which software possesses a desired combination of attributes. This desired combination of attributes need to be clearly defined; otherwise, assessment of quality is left to intuition.

(from ISO/IEC Standard 25010): The quality of a system is the degree to which the system satisfies the stated and implied needs of its various stakeholders, and thus provides value. These stated and implied needs are represented in the ISO 25000 quality models that categorize product quality into characteristics, which in some cases are further subdivided into subcharacteristics.

⁸³https://en.wikipedia.org/wiki/IEEE_1471

⁸⁴<http://www.sei.cmu.edu/architecture/start/glossary/classicdefs.cfm>

S.O.L.I.D. principles

SOLID (single responsibility, open-closed, Liskov substitution, interface segregation and dependency inversion) is an acronym for some principles (named by [Robert C. Martin](#)⁸⁵) to improve object-oriented programming and design. The principles make it more likely that a developer will write code that is easy to maintain and extend over time.

For some additional sources, see [Martin-SOLID](#).

Stable Abstractions Principle

A fundamental principle for designing the structure of software systems (also see [Package Principles](#)). It demands that the abstractness of components is proportional to their stability. The closely related [SDP](#) also explains the notion of *stability* in this context.

We want components that represent abstract concepts and responsibilities to require little or no modification because many conceptually more specific (concrete) components depend on them. And we want components that should or could not easily change to be at least abstract enough so we can extend them. This relates to the [OCP](#).

The SAP can sound like a circular argument until the underlying idea shines through: *Concrete* things and concepts are naturally more volatile, specific, arbitrary and numerous than *abstract* ones. The component structure of a system simply should reflect that. General logic, the system's physical artifacts as well as its functional and technical concepts should all be in congruence.

The SAP is closely related to the [SDP](#). Their combination amounts to a more general and arguably more profound version of the [DIP](#): Specific concepts naturally depend on more *abstract* ones because they are composed or derived from more general-purpose building blocks. And dependent concepts are naturally more *specific* because they are defined by more information than their dependencies (assuming there are [no dependence cycles](#)).

Category: Design-Principle

Stable Dependencies Principle

A fundamental principle for designing the structure of software systems (also see [Package Principles](#)). It demands that frequently changing components depend on more stable ones.

Part of the volatility of a component is [expected](#) and naturally implied by its particular responsibility.

But stability in this context is also a function of incoming and outgoing dependencies. A component that is heavily depended on by others is harder to change and considered to be more stable. A component that heavily depends on others has more reasons to change and is considered to be less stable.

So in regards to dependence, a component with many clients should not depend on one with many dependencies. A single component with both of these properties is also a red flag. Such a component has many reasons to change but is at the same time hard to change.

⁸⁵<http://butunclebob.com/ArticleS.UncleBob.PrinciplesOfOod>

Original definitions of the SDP (like [Martin-2003](#)) involve a [metric *I* of instability](#)⁸⁶. Unfortunately, that metric doesn't capture intended/inherent volatility, transitive dependence or cases like the red flag mentioned above. But we value the idea of the SDP regardless of how it can be measured.

The SDP is closely related to the [SAP](#). Their combination amounts to a version of the [DIP](#) (more on this under [SAP](#)).

Category: Design-Principle

Stakeholder

Person or organization that can be affected by or have an interest (*stake*) in a system, its development or execution.

Examples include users, employees, owners, administrators, developers, designer, manager, product-owner, project manager,

Following ISO/IEC/IEEE 42010 a stakeholder is a (system) individual, team, organization, or classes thereof, having an interest in a system (as defined in ISO/IEC/IEEE 42010).

Category: ISO-IEC-IEEE-42010

Structure

An arrangement, order or organization of interrelated elements in a system. Structures consist of building blocks (structural elements) and their relationships (dependencies).

Structures in software architecture are often used in [architecture views](#), e.g. the [building block view](#). A documentation template (e.g. [arc42](#)) is a kind of structure too.

Structural element

see *Building block* or *Component*

Symmetric Cryptography

Symmetric cryptography is based on an identical key for encryption and decryption of data. Sender and receiver have to agree on a key for communication. See [Schneier, Symmetric Algorithms, page 17](#).

Category: Security

⁸⁶https://en.wikipedia.org/wiki/Software_package_metrics

System

Collection of elements (building blocks, components etc) organized for a common purpose.

In ISO/IEC/IEEE Standards a couple of system definitions are available:

- systems as described in [ISO/IEC 15288]: “systems that are man-made and may be configured with one or more of the following: hardware, software, data, humans, processes (e.g., processes for providing service to users), procedures (e.g. operator instructions), facilities, materials and naturally occurring entities”.
- software products and services as described in [ISO/IEC 12207].
- software-intensive systems as described in [IEEE Std 1471:2000]: “any system where software contributes essential influences to the design, construction, deployment, and evolution of the system as a whole” to encompass “individual applications, systems in the traditional sense, subsystems, systems of systems, product lines, product families, whole enterprises, and other aggregations of interest”.

Category: ISO-IEC-IEEE-42010

System-of-Interest

System-of-Interest (or simply, system) refers to the system whose architecture is under consideration in the preparation of an architecture description (as defined in ISO/IEC/IEEE 42010).

Category: ISO-IEC-IEEE-42010

Template (for documentation)

Standardized order of artifacts used in software development. It can help base other files, especially documents in a predefined structure without prescribing the content of these single files.

A well known example of such templates is [arc42](#)⁸⁷

Testability Quality Attribute

Degree of effectiveness and efficiency with which test criteria can be established for a system, product or component and tests can be performed to determine whether those criteria have been met. Is a sub-characteristic of: [maintainability](#). Refer to [ISO 25010](#)⁸⁸ website. Category: Quality, ISO 25010

Time Behaviour Quality Attribute

Degree to which the response and processing times and throughput rates of a product or system, when performing its functions, meet requirements. Is a sub-characteristic of: [performance efficiency](#). Refer to [ISO 25010](#)⁸⁹ website.

Category: Quality, ISO 25010

⁸⁷<http://arc42.de>

⁸⁸<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

⁸⁹<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

TLS

Transport-Layer-Security is a set of protocols to cryptographically secure the communication of two parties by the means of the [CIA-triad](#). It is widely used for secure communication on the internet and the foundation for HTTPS.

TLS started as an update to its predecessor SSL (Secure Socket Layer) Version 3.0 and should be used now instead of SSL see [RFC7568 “Deprecating Secure Sockets Layer Version 3.0”⁹⁰](#).

Category: Security

TOGAF

The Open Group Architecture Framework. Conceptual framework for planning and maintenance of enterprise IT architectures.

Tools-and-material-approach

t.b.d.

Top-Down

“Direction of work” or “order of communication”: Starting from an abstract or general construct working towards more concrete, special or detailed representation.

Traceability

(more precisely: *requirements traceability*): Document that

1. all requirements are addressed by elements of the system (forward traceability) and
2. all elements of the system are justified by at least one requirement (backward traceability)

My personal opinion: If you can, you should avoid traceability, as it creates a lot of documentation overhead.

Tradeoff

(syn: compromise). A balance achieved or negotiated between two desired or required but usually incompatible or contradicting features. For example, software development usually has to tradeoff memory consumption and runtime speed.

More colloquially, if one thing increases, some other thing must decrease.

Even more colloquially: There is no free lunch. Every quality attribute has a price among other quality attributes.

⁹⁰<https://tools.ietf.org/html/rfc7568>

Trainer

A trainer is a person who conducts a training course himself, provided that this is carried out within the framework of a accreditation granted to an accredited [training provider](#). Accordingly, accredited training providers may only organise and conduct CPSA training courses with accredited trainers. Only accredited training providers can apply for trainer [accreditations](#).

Training Level

The iSAQB® CPSA education programme is divided into (currently) two Training Levels: *Foundation Level* and *Advanced Level*. The Training Levels should contain knowledge that builds upon one another. The exact relationships between each other and the contents of the Training Level are defined in the respective curricula (*syllabi*).

Training Provider

An organisation or person who holds the rights of use to accredited training materials or who has purchased [accreditation](#) for training materials, provides trainers and infrastructure and conducts training courses.

Ubiquitous language

A concept of [Domain-Driven Design](#): The ubiquitous language is a language that is structured around the [domain model](#). It is used by all team members to connect all the activities of the team with the software. The ubiquitous language is a living thing that is evolving during a project and will be changed during the whole live cycle of the software.

Unified Modeling Language (UML)

Graphical language for visualizing, specifying and documenting the artifacts and structures of a software system.

- For building block views or the context view, use component diagrams, with either components, packages or classes to denote building blocks.
- For runtime views, use sequence- or activity diagrams (with swimlanes). Object diagrams can theoretically be used, but are practically not advised, as they become cluttered even for small scenarios.
- For Deployment views, use deployment diagrams with node symbols.

Usability Quality Attribute

Degree to which a product or system can be used by specified users to achieve specified goals with effectiveness, efficiency and satisfaction in a specified context of use. Is composed of the following sub-characteristics: [appropriateness](#) [recognizability](#), [learnability](#), [operability](#), [user error protection](#), [user interface aesthetics](#), [accessibility](#). Refer to [ISO 25010⁹¹](#) website. Category: Quality, ISO 25010

⁹¹<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

User Error Protection Quality Attribute

Degree to which a system protects users against making errors. Is a sub-characteristic of: [usability](#). Refer to [ISO 25010⁹²](#) website. Category: Quality, ISO 25010

User Interface Aesthetics Quality Attribute

Degree to which a user interface enables pleasing and satisfying interaction for the user. Is a sub-characteristic of: [usability](#). Refer to [ISO 25010⁹³](#) website. Category: Quality, ISO 25010

Uses relationship

Dependency that exists between two building blocks. If A uses B then execution of A depends on the presence of a correct implementation of B.

Value Object

Value Object is a building block of [Domain-Driven Design](#). ValueObjects do not have a conceptual identity of their own and should be treated as immutable. They are used to describe the state of [entities](#) and may be composed of other value objects but never of [entities](#).

View

see: architectural view.

Waterfall development

Development approach “where you gather all the requirements up front, do all necessary design, down to a detailed level, then hand the specs to the coders, who write the code; then you do testing (possibly with a side trip to IntegrationHell) and deliver the whole thing in one big end-all release. Everything is big including the risk of failure.” (quoted from [<http://c2.com/cgi/wiki?IterativeDevelopment>])

Contrast to *iterative development*

Web of Trust

Since a single [CA](#) could be an easy target for an attacker the web of trust delegates the establishment of trust to the user. Each user decides which other users proof of identity he trusts, usually by verifying a fingerprint of a given key. This trust is expressed by signing the key of the other user who can then publish it with the additional signature. A third user can then verify this signature and decide to trust the identity or not.

The email encryption PGP is an example for a [PKI](#) based on a web of trust.

Category: Security

⁹²<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

⁹³<http://iso25000.com/index.php/en/iso-25000-standards/iso-25010>

Whitebox

Shows the internal structure of a system or building block, made up from blackboxes and the internal/external relationships / interfaces.

Workflow Management System (WFMS)

Provides an infrastructure for the set-up, performance and monitoring of a defined sequence of tasks, arranged as a workflow. (quoted from Wikipedia)

Wrapper

(syn: Decorator, Adapter, Gateway) Patterns to abstract away the concrete interface or implementation of a component. Attach additional responsibilities to an object dynamically.



Comment (Gernot Starke)

The tiny differences found in literature regarding this term often don't matter in real-life. *Wrapping* a component or building-block shall have a clear semantics within a single software system.

Translations

Here you find translations of the terms between English and German (see below) and [German-to-English](#) (next section).

Several of these terms are based in the legal and organizational foundations of the iSAQB association (and therefore not related to software architecture).

The following translations are maintained⁹⁴ in a simple JSON input file, contained within this books' open source [Github repository](#)⁹⁵.

Translations English to German

Please note: This translation table is not supposed to be complete, several English terms will not be translated but preferably used in their original language (e.g. many of the design pattern names).

The following tables have been automatically generated⁹⁶ from JSON by Groovy and Gradle.

| English | German |
|-------------------------|---|
| Adaption | Anpassung |
| Adequacy | Angemessenheit |
| Approach | Ansatz |
| Appropriateness | Angemessenheit |
| Architectural objective | Architekturziel |
| Architectural pattern | Architekturmuster |
| Architectural view | Architektursicht, Sicht |
| Architecture assessment | Architekturanalyse, Architekturbewertung |
| Architecture evaluation | Architekturbewertung, Architekturanalyse |
| Architecture objective | Architekturziel |
| Articles of association | Satzung des Vereins |
| Artifact | Artefakt |
| Aspect | Aspekt, Belang |
| Assessment | Bewertung, Begutachtung, Einschätzung, Untersuchung |
| Association | Verein, Beziehung |
| Attack Tree | Angriffsbäume |
| Availability | Verfügbarkeit |
| Building block | Baustein |

⁹⁴The documentation found in <https://github.com/isaqb-org/glossary> contains all information required to generate the translation tables. Currently, only English and German are supported. The translation tables are maintained in JSON format, suggestions for improvements are highly welcome!

⁹⁵<https://github.com/isaqb-org/glossary>

⁹⁶133 english terms, generated on Oktober/04/2016

| English | German |
|-------------------------------------|--|
| Building block view | Bausteinsicht |
| Business | Fachlichkeit, Domäne |
| Business architecture | fachliche Architektur, Geschäftsarchitektur |
| Cabinet (as methaphor for template) | Schrank (als Metapher für Template) |
| Cash audit | Rechnungsprüfung |
| Cash auditor | Rechnungsprüfer |
| Certification authority | Zertifizierungsstelle |
| Certification body | Zertifizierungsstelle |
| Chairman | Vorsitzender |
| Channel | Kanal |
| Cohesion | Kohäsion, innerer Zusammenhalt |
| Commensurability | Angemessenheit, Messbarkeit, Vergleichbarkeit |
| Compliance | Erfüllung, Einhaltung |
| Component | Baustein, Komponente |
| Concern | Belang |
| Confidentiality | Vertraulichkeit |
| Constraint | Randbedingung, Einschränkung |
| Context (of a term) | Einordnung (eines Begriffes) in einen Zusammenhang |
| Context view | Kontextabgrenzung |
| Coupling | Kopplung, Abhängigkeit |
| Crosscutting | Querschnittlich |
| Curriculum | Lehrplan |
| Decomposition | Zerlegung |
| Dependency | Abhängigkeit, Beziehung |
| Deployment | Verteilung |
| Deployment unit | Verteilungsartefakt |
| Deployment view | Verteilungssicht |
| Deputy chairman | Stellvertretender Vorsitzender |
| Design | Entwurf |
| Design approach | Entwurfsansatz, Entwurfsmethodik |
| Design decision | Entwurfsentscheidung |
| Design principle | Entwurfsprinzip |
| Domain | Fachdomäne, Fachlicher Bereich, Geschäftsbereich |
| Domain-related architecture | fachliche Architektur |
| Drawing Tool | Mal-/Zeichenprogramm |
| Economicalness | Sparsamkeit, Wirtschaftlichkeit |
| Embedded | Eingebettet |
| Encapsulation | Kapselung |
| Enterprise IT architecture | Unternehmens-IT-Architektur |
| Estimation | Schätzung |
| Evaluation | Bewertung |
| Examination question | Prüfungsfrage |
| Examination rules and regulations | Prüfungsordnung |
| Examination sheet | Prüfungsbogen |
| Examination task | Prüfungsaufgabe |
| Examinee | Prüfling |
| Examiner | Prüfer |
| Executive board | Vorstand |

| English | German |
|--|--|
| Fees rules and regulations | Gebührenordnung |
| General meeting | Mitgliederversammlung |
| Influencing Factor | Einflussfaktor |
| Information hiding principle | Geheimnisprinzip |
| Integrity | Integrität |
| Interdependency (between design decisions) | Abhängigkeit (zwischen Entwurfsentscheidungen) |
| Interface | Schnittstelle |
| Interface description | Schnittstellenbeschreibung, Schnittstellendokumentation |
| Learning goal | Lernziel |
| License fee | Lizenzgebühr |
| License holder | Lizenznehmer |
| Licensee | Lizenznehmer |
| Licensing agreement | Lizenzvertrag, Lizenzvereinbarung |
| Licenser | Lizenzgeber |
| Local court | Amtsgericht |
| Means for describing | Beschreibungsmittel |
| Means for documenting | Beschreibungsmittel |
| Measurability | Messbarkeit |
| Members' meeting | Mitgliederversammlung |
| Modeling Tool | Modellierungswerkzeug |
| Module | Komponente, Modul, Baustein |
| Node | Knoten |
| Non-exclusive license | Einfache Lizenz |
| Non-profit | Gemeinnützig |
| Notification | Benachrichtigung |
| Objective | Ziel |
| Operational processes | Betriebsprozesse (von Software) |
| Pattern | Muster |
| Pattern language | Mustersprache, Musterfamilie |
| Perspective | Perspektive |
| Principle | Prinzip, Konzept |
| Quality attribute | Qualitätsmerkmal, Qualitätseigenschaft |
| Quality characteristic | Qualitätsmerkmal, Qualitätseigenschaft |
| Quality feature | Qualitätsmerkmal, Qualitätseigenschaft |
| Rationale | Begründung, Erklärung |
| Real-time system | Echtzeitsystem |
| Registered trademark | Marke (gesetzlich geschützt) |
| Relationship | Beziehung |
| Relationship (kind of) | Beziehungsart |
| Repository | Ablage |
| Requirement | Anforderung |
| Resolution | Beschluss |
| Responsibility | Verantwortlichkeit |
| Rights of use | Nutzungsrecht |
| Runtime | Laufzeit |
| Runtime view | Laufzeitsicht |
| Security Goals | Schutzziele, Sachziele |
| Skill | Fähigkeit, Fertigkeit |

| English | German |
|--|--|
| Specification (of software architecture) | Beschreibung (von Softwarearchitektur) |
| sponsoring (board) member | materiell förderndes Mitglied |
| statutory | satzungsgemäß |
| Structure | Struktur |
| Task | Aufgabe |
| Team regulations | Arbeitsgruppenordnung |
| Term | Begriff |
| Thriftyness | Sparsamkeit, Wirtschaftlichkeit |
| Tools | Arbeitsmittel, Werkzeug |
| Tools-and-material-approach | Werkzeug-Material-Ansatz |
| Tradeoff | Kompromiss, Abwägung |
| Training provider | Schulungsanbieter |
| Treasurer | Schatzmeister |
| Uses relationship | Benutzt-Beziehung, Nutzungsbeziehung |
| View | Sicht |
| Workflow management | Ablaufsteuerung |
| Working environment | Arbeitsumgebung |
| Working group | Arbeitsgruppe |
| Working group head | Arbeitsgruppenleiter |

Translations German to English

In this section we collect the iSAQB translation of the terms from German to English.

Please note: This translation table is not supposed to be complete, several English terms will not be translated but preferably used in their original language (e.g. many of the design pattern names).

| German | English |
|--|--|
| Abhängigkeit | Coupling, Dependency |
| Abhängigkeit (zwischen Entwurfsentscheidungen) | Interdependency (between design decisions) |
| Ablage | Repository |
| Ablaufsteuerung | Workflow management |
| Abwägung | Tradeoff |
| Amtsgericht | Local court |
| Anforderung | Requirement |
| Angemessenheit | Adequacy, Appropriateness, Commensurability |
| Angriffsbäume | Attack Tree |
| Anpassung | Adaption |
| Ansatz | Approach |
| Arbeitsgruppe | Working group |
| Arbeitsgruppenleiter | Working group head |
| Arbeitsgruppenordnung | Team regulations |
| Arbeitsmittel | Tools |
| Arbeitsumgebung | Working environment |
| Architekturanalyse | Architecture assessment, Architecture evaluation |
| Architekturbewertung | Architecture assessment, Architecture evaluation |
| Architekturmuster | Architectural pattern |
| Architektursicht | Architectural view |
| Architekturziel | Architectural objective, Architecture objective |
| Artefakt | Artifact |
| Aspekt | Aspect |
| Aufgabe | Task |
| Baustein | Building block, Component, Module |
| Bausteinsicht | Building block view |
| Begriff | Term |
| Begründung | Rationale |
| Begutachtung | Assessment |
| Belang | Aspect, Concern |
| Benachrichtigung | Notification |
| Benutzt-Beziehung | Uses relationship |
| Beschluss | Resolution |
| Beschreibung (von Softwarearchitektur) | Specification (of software architecture) |
| Beschreibungsmittel | Means for describing, Means for documenting |

| German | English |
|--|--|
| Betriebsprozesse (von Software) | Operational processes |
| Bewertung | Assessment, Evaluation |
| Beziehung | Association, Dependency, Relationship |
| Beziehungsart | Relationship (kind of) |
| Domäne | Business |
| Echtzeitsystem | Real-time system |
| Einfache Lizenz | Non-exclusive license |
| Einflussfaktor | Influencing Factor |
| Eingebettet | Embedded |
| Einhaltung | Compliance |
| Einordnung (eines Begriffes) in einen Zusammenhang | Context (of a term) |
| Einschränkung | Constraint |
| Einschätzung | Assessment |
| Entwurf | Design |
| Entwurfsansatz | Design approach |
| Entwurfsentscheidung | Design decision |
| Entwurfsmethodik | Design approach |
| Entwurfsprinzip | Design principle |
| Erfüllung | Compliance |
| Erklärung | Rationale |
| Fachdomäne | Domain |
| fachliche Architektur | Business architecture, Domain-related architecture |
| Fachlicher Bereich | Domain |
| Fachlichkeit | Business |
| Fertigkeit | Skill |
| Fähigkeit | Skill |
| Gebührenordnung | Fees rules and regulations |
| Geheimnisprinzip | Information hiding principle |
| Gemeinnützig | Non-profit |
| Geschäftsarchitektur | Business architecture |
| Geschäftsbereich | Domain |
| innerer Zusammenhalt | Cohesion |
| Integrität | Integrity |
| Kanal | Channel |
| Kapselung | Encapsulation |
| Knoten | Node |
| Kohäsion | Cohesion |
| Komponente | Component, Module |
| Kompromiss | Tradeoff |
| Kontextabgrenzung | Context view |
| Konzept | Principle |
| Kopplung | Coupling |
| Laufzeit | Runtime |
| Laufzeitsicht | Runtime view |
| Lehrplan | Curriculum |
| Lernziel | Learning goal |
| Lizenzgeber | Licensor |
| Lizenzgebühr | License fee |

| German | English |
|-------------------------------------|---|
| Lizenznehmer | Licensee, License holder |
| Lizenzvereinbarung | Licensing agreement |
| Lizenzvertrag | Licensing agreement |
| Mal-/Zeichenprogramm | Drawing Tool |
| Marke (gesetzlich geschützt) | Registered trademark |
| materiell förderndes Mitglied | sponsoring (board) member |
| Messbarkeit | Commensurability, Measurability |
| Mitgliederversammlung | General meeting, Members' meeting |
| Modellierungswerkzeug | Modeling Tool |
| Modul | Module |
| Muster | Pattern |
| Musterfamilie | Pattern language |
| Mustersprache | Pattern language |
| Nutzungsbeziehung | Uses relationship |
| Nutzungsrecht | Rights of use |
| Perspektive | Perspective |
| Prinzip | Principle |
| Prüfer | Examiner |
| Prüfling | Examinee |
| Prüfungsaufgabe | Examination task |
| Prüfungsbogen | Examination sheet |
| Prüfungsfrage | Examination question |
| Prüfungsordnung | Examination rules and regulations |
| Qualitätseigenschaft | Quality attribute, Quality characteristic, Quality feature |
| Qualitätsmerkmal | Quality attribute, Quality characteristic, Quality feature |
| Querschnittlich | Crosscutting |
| Randbedingung | Constraint |
| Rechnungsprüfer | Cash auditor |
| Rechnungsprüfung | Cash audit |
| Sachziele | Security Goals |
| Satzung des Vereins | Articles of association |
| satzungsgemäß | statutory |
| Schatzmeister | Treasurer |
| Schnittstelle | Interface |
| Schnittstellenbeschreibung | Interface description |
| Schnittstellendokumentation | Interface description |
| Schrank (als Metapher für Template) | Cabinet (as methaphor for template) |
| Schulungsanbieter | Training provider |
| Schutzziele | Security Goals |
| Schätzung | Estimation |
| Sicht | Architectural view, View |
| Sparsamkeit | Economicalness, Thriftyness |
| Stellvertretender Vorsitzender | Deputy chairman |
| Struktur | Structure |
| Unternehmens-IT-Architektur | Enterprise IT architecture |
| Untersuchung | Assessment |
| Verantwortlichkeit | Responsibility |

| German | English |
|--------------------------|---|
| Verein | Association |
| Verfügbarkeit | Availability |
| Vergleichbarkeit | Commensurability |
| Verteilung | Deployment |
| Verteilungsartefakt | Deployment unit |
| Verteilungssicht | Deployment view |
| Vertraulichkeit | Confidentiality |
| Vorsitzender | Chairman |
| Vorstand | Executive board |
| Werkzeug | Tools |
| Werkzeug-Material-Ansatz | Tools-and-material-approach |
| Wirtschaftlichkeit | Economicalness, Thriftyness |
| Zerlegung | Decomposition |
| Zertifizierungsstelle | Certification authority, Certification body |
| Ziel | Objective |

Categories

We use categories to add structure to the terms in the glossary. Every term might belong to zero or more of the following categories:

Architecture-Pattern

Name of an architecture pattern or -style from e.g. [Buschmann+96], [Fowler2003], [Hohpe+2003], [Quian+2010] or other fundamental references.

Communication

Used or needed to communicate information about arbitrary aspects of software architecture.

DDD

Keyword from the CPSA-Advanced curriculum “Domain Driven Design”

Design-Pattern

Name of a design pattern from e.g. [Gamma+95] or other fundamental sources.

Design-Principle

Name of a fundamental design principle.

Foundation

Terms required for or contained in the CPSA-Foundation curriculum.

Fundamental

Fundamental term.

Improve

Keyword from the CPSA-Advanced curriculum “IMPROVE”.

iSAQB

Official iSAQB terms, many of them used for contracts, association and other organizational stuff.

Metric

Defined measure to what degree a software system (or related process) possesses some property. Examples: Size (e.g. Lines-of-Code, cyclomatic complexity, coupling, mean-time-between-failure)

Security

Measures to reach basic principles like confidentiality, integrity, availability and non-repudation for data in an IT-system.

ISO-IEC-IEEE-42010

ISO/IEC/IEEE 42010:2011 Systems and software engineering Architecture description. Note, a new version of the standard was expected to be published till the end of 2016.

References and Resources

Anderson-2008

Ross Anderson, *Security Engineering - A Guide to Building Dependable Distributed Systems*, 2nd edition 2008, John Wiley & Sons.

One of the most comprehensive books about information security available.

Bachmann+2000

Bachmann, Felix/Bass, Len/Carriere, Jeromy/Clements, Paul/Garlan, David/Ivers, James/Nord, Robert/Little, Reed. *Software Architecture Documentation in Practice*, Special Report CMU/SEI-2000-SR-004, 2000.

Bass+2012

Bass, L/Clements, P/Kazman, R.: *Software Architecture in Practice*

3rd edition, Addison-Wesley, 2012. Although the title suggests otherwise, a quite fundamental (and sometimes abstract) book. The authors have a strong background in ultra-large scale (often military) systems - so their advice might sometimes conflicts with small or lean kinds of projects.

Brown-2015

Brown, Simon: *Software Architecture For Developers*,

<https://leanpub.com/software-architecture-for-developers>⁹⁷ Leanpub Publishing. Very practical and pragmatic.

Buschmann+1996

Also known as POSA-1.

Buschmann, Frank/Meunier, Regine/Rohnert, Hans/Sommerlad, Peter: *A System of Patterns: Pattern-Oriented Software Architecture 1*, 1st edition, 1996, John Wiley & Sons.

Most likely the most famous and groundbreaking book on architecture patterns.

Buschmann+2007

Also known as POSA-4.

Buschmann, Frank/Henney, Kevlin/Schmidt, Douglas C.: *Pattern-Oriented Software Architecture: A Pattern Language for Distributed Computing*, Volume 4, 2007, John Wiley & Sons.

Describes a pattern language for distributed computing that guides readers through the best practices and introduce them to key areas of building distributed software systems. The book connects hundreds of stand-alone patterns, pattern collections, and pattern languages from the existing body of literature found in the POSA series.

⁹⁷<https://leanpub.com/software-architecture-for-developers>

Buschmann+2007b

Also known as POSA-5.

Buschmann, Frank/Henney, Kevlin/Schmidt, Douglas C.: *Pattern-Oriented Software Architecture: On Patterns and Pattern Languages*, Volume 5, 2007, John Wiley & Sons.

A meta-explanation, addresses the question of what a pattern language is and compares various pattern paradigms.

Clements+2002

Clements, Paul/Kazman, Rick/Klein, Mark: *Evaluating Software Architectures: Methods and Case Studies*, Addison-Wesley, 2001.

Clements+2010

Clements, Paul/Bachmann, Felix/Bass, Len/Garlan, David/Ivers, James/Little, Reed/Merson, Paulo/Nord, Robert. *Documenting Software Architectures: Views and Beyond*, 2nd edition, Addison Wesley, 2010

Evans-2004

Evans, Eric: *Domain-Driven Design: Tackling Complexity in the Heart of Software*, 1st edition, Addison-Wesley, 2004.

Fowler-2003

Fowler, Martin: *Patterns of Enterprise Application Architecture*, Addison-Wesley, 2003.

Great support for building information systems.

Gamma+1994

Gamma, Erich/Helm, Richard/Johnson, Ralph/Vlissides, John M. *Design Patterns: Elements of Reusable Object-Oriented Software*, 1st edition, 1994, Addison-Wesley, 1994.

A classic on design patterns.

GoF (Gang of Four)

See [Gamma+1994](#)

Gorton-2011

Gorton, I. *Essential Software Architecture*, 2nd edition, Springer, 2011

Hargis+2004

Hargis, Gretchen/Carey, Michelle/Hernandez, Ann: *Developing Quality Technical Information: A Handbook for Writers and Editors*, IBM Press, 2nd edition, Prentice Hall, 2004.

If you need to write lots of documentation, you should have a look at this book.

Hofmeister+2000

Hofmeister, Christine/Nord, Robert/Soni, Dilip: *Applied Software Architecture*, 1st edition, Addison-Wesley, 1999

Hohpe+2003

Hohpe, G/Woolf, B: *Enterprise Integration Patterns: Designing, Building, and Deploying Messaging Solutions*, Addison Wesley, 2003.

A very important book and timeless book for people creating integrated systems.

Kelly+2009

Steven Kelly and Risto Pohjonen: *Worst Practices for Domain-Specific Modeling* IEEE Software, volume 26, No. 4 July/August 2009, p22-30.

Authors explain several *bad practices* of domain modeling and give advice how and why to avoid those.

Kruchten-1995

Kruchten, Philippe. *The 4+1 View Model of Architecture*, IEEE Software, volume 12 (6), pp 45-50, 1995.

Lilienthal-2019

Lilienthal, Carola: *Langlebige Software-Architekturen: Technische Schulden analysieren, begrenzen und abbauen* 3rd edition, dpunkt.verlag, 2019

Martin-SOLID

Martin, Robert C: S.O.L.I.D.

S.O.L.I.D is an acronym for the first five object-oriented design(OOD) principles by Robert C. Martin. Some of the original papers have been moved around onto various locations - see the following:

- [Wikipedia on SOLID](#)⁹⁸
- A nice [Introduction](#)⁹⁹ by [Samuel Oloruntoba](#)¹⁰⁰

⁹⁸[https://en.wikipedia.org/wiki/SOLID_\(object-oriented_design\)](https://en.wikipedia.org/wiki/SOLID_(object-oriented_design))

⁹⁹<https://scotch.io/bar-talk/s-o-l-i-d-the-first-five-principles-of-object-oriented-design>

¹⁰⁰<https://scotch.io/@kayandrae>

Martin-2003

Martin, Robert C: *Agile Software Development: Principles, Patterns and Practices*, Prentice Hall, 2002

McGraw-2006

Garry McGraw, "Software Security - Building Security In", Addison-Wesley 2006

Covering the whole process of software design from a security perspective by the means of risk management, code reviews, risk analysis, penetration testing, security testing and abuse case development.

Parnas-1972

Parnas, David: *On the criteria to be used in decomposing systems into modules*", Communications of the ACM, volume 15, issue 12, Dec 1972

One of the most influential articles ever written in software engineering, introducing encapsulation and modularity.

POSA-1

Pattern-Oriented Software Architecture, Volume 1. See [Buschmann+1996](#).

POSA-2

Pattern-Oriented Software Architecture, Volume 2. See [Schmidt+2000](#).

POSA-4

Pattern-Oriented Software Architecture, Volume 4. See [Buschmann+2007](#).

POSA-5

Pattern-Oriented Software Architecture, Volume 5. See [Buschmann+2007b](#).

Qian+2010

Qian, K/Fu, X/Tao, L/Xu, C/Herrera, J: *Software Architecture and Design Illuminated*, 1st edition, Jones and Bartlett, 2010.

Well-structure and readable collection of architecture styles and patterns.

Rozanski+2011

Rozanski, Nick/Woods, Eoin: *Software Systems Architecture - Working with Stakeholders Using Viewpoints and Perspectives*, 2nd Edition, Addison Wesley 2011.

Presents a set of architectural viewpoints and perspectives.

RMIAS-2013

Yulia Cherdantseva, Jeremy Hilton, A Reference Model of Information Assurance & Security, 2013 Eight International Conference on Availability, Reliability and Security (ARES), DOI: 10.1109/ARES.2013.72 , <http://users.cs.cf.ac.uk/Y.V.Cherdantseva/RMIAS.pdf>

Conference Paper of Yulia Cherdantseva and Jeremy Hilton describing the RMIAS.

Schmidt+2000

Also known as POSA-2.

Schmidt, Douglas C/Stal, Michael/Rohnert, Hans/Buschmann, Frank. Pattern-Oriented Software Architecture, volume 2: *Patterns for Concurrent and Networked Objects*, Wiley & Sons, 2000

Schneier-1996

Bruce Schneier, Applied Cryptography, 2nd Edition 1996, John Wiley & Sons

Comprehensive survey of modern cryptography.

Shaw+1996

Shaw, Mary/Garlan, David: *Software Architecture: Perspectives on an Emerging Discipline*, Prentice Hall, 1996

Starke-2018

Starke, Gernot: *Effective Software Architectures: iSAQB CPSA-Foundation© Certification Study Guide* Leanpub, 2018. Available online <https://leanpub.com/esa42>¹⁰¹.

A study guide for the CPSA-Foundation examination.

¹⁰¹<https://leanpub.com/esa42>

Appendix A: The iSAQB e.V. Association



The International Software Architecture Qualification Board (iSAQB e.V., <http://isaqb.org>) is a non-profit organization with members from industry, development and consulting firms, education, academia and other organizations.

It is established as an *association* (e.V.) according to German law with the following objectives:

- Creating and maintaining consistent **curricula** for software architects.
- **Defining certification examinations** based upon the various CPSA curricula
- **Ensuring high quality of teaching** for software architects
- Ensuring a high quality of its software architecture certifications

iSAQB defines and prescribes training and examination regulations, but does not carry out any training or examinations itself. iSAQB trainings are carried out by (licensed) training and examination organizations.

iSAQB monitors and audits the quality of these trainings and all associated processes (e.g. certification procedures).

Appendix B: About the Authors

Gernot Starke

Dr. Gernot Starke ([innoQ](http://innoq.com)¹⁰² Fellow) is co-founder and longstanding user of the (open source) [arc42](https://arc42.org)¹⁰³ documentation template. For more than 20 years he works as software architect, coach and consultant, conquering the challenges of creating effective software architectures for clients from various industries.

In 2008 Gernot co-founded the International Software Architecture Qualification Board ([iSAQB e.V.](https://isaqb.org)¹⁰⁴) and since then supports it as an active member.

Gernot has authored several (German) books on software architecture and related topics and initiated this glossary.

He lives in Cologne with his wife (*Cheffe Uli*).

Ulrich Becker

Ulrich Becker works as principal consultant at [Method Park](http://www.methodpark.de)¹⁰⁵, focussing on software architecture and application lifecycle management.

Ulrich studied computer science at the University of Hamburg and the University of Erlangen-Nürnberg. He received his PhD from the University of Erlangen-Nürnberg in 2003 for his work on model-based distribution configuration. He then became group leader for the adaptive system software group at [Fraunhofer IIS](http://www.iis.fraunhofer.de/)¹⁰⁶.

Since 2005 Ulrich works as a trainer, consultant and coach at Method Park where he supports his clients in improving their development processes and methods. Most of his clients are from the automotive industry or other heavily regulated industries.

Ulrich is a founding member of [iSAQB e.V.](https://isaqb.org)¹⁰⁷ where he contributes to the foundation level and advanced level working groups. He lives in Erlangen with his family.

Matthias Bohlen

Matthias Bohlen, [independent expert](http://mbohlen.de)¹⁰⁸ for effective product development, started his career as a software developer in 1980. He wrote compilers for the MC68020 processor by Motorola which was quite a revolutionary device in those days where there was no IBM PC, yet. And the compilers really sold well.

¹⁰²<http://innoq.com>

¹⁰³<https://arc42.org>

¹⁰⁴<https://isaqb.org>

¹⁰⁵<http://www.methodpark.de>

¹⁰⁶<http://www.iis.fraunhofer.de/>

¹⁰⁷<http://isaqb.org>

¹⁰⁸<http://mbohlen.de>

Since then, Matthias has worked with countless software teams, helping them to get working software out the door without losing their mind. This is what he still does today.

Matthias is an active member of the [International Software Architecture Qualification Board¹⁰⁹](#), writes [a blog¹¹⁰](#), is being known in the Lean/Agile field, and speaks at conferences for software development.

Phillip Ghadir

Member of the board of innoQ Deutschland GmbH. Since many years, Phillip consults clients from various industries in topics around software-architecture, technology and development. He co-founded the iSAQB and regularly conducts trainings on software-architecture.

Carola Lilienthal

Dr. Carola Lilienthal is software architect at and co-founder of the [WPS Workplace-Solutions¹¹¹](#). For 20 years she has been working as a developer, project manager, coach, consultant and architect. Carola was an early adopter of Domain-Driven Design and agile movement and has successfully worked for numerous clients from various domains, mainly finance, insurance and logistics.

Since 2003, she has been analyzing software systems in Java, C++, C#, PHP, ABAP and gives advice to development teams how to improve the sustainability of their code. Carola speaks regularly on conferences and has written various articles as well as a book on sustainable software architecture.

Since 2008 Carola has been supporting the International Software Architecture Qualification Board ([iSAQB e.V.¹¹²](#)) as an active member.

Mahbouba Gharbi

Mahbouba Gharbi is CIO of iTech Progress, book author and conference speaker.

Several years ago Mahbouba became president of the iSAQB. She lives in Mannheim with her family.

Mirko Hillert

Mirko is chairman and CEO of the iSAQB GmbH, the commercial branch of the iSAQB association. He contributed the majority of the more formal terms, concerning accreditation and the like.

¹⁰⁹<http://www.isaqb.org>

¹¹⁰<http://mbohlen.de>

¹¹¹<https://wps.de>

¹¹²<http://isaqb.org>

Simon Kölsch

Simon Kölsch works as a senior consultant at innoQ with a focus on web architecture and security.

Simon is enthusiastic about solutions beyond the classical monolithic enterprise application, covering the architecture of distributed systems and their infrastructure, logging and monitoring.

He is not committed to one specific technology or programming language, but has a strong JVM background.

Michael Mahlberg

Michael Mahlberg runs his own [method consultancy](#)¹¹³ in Germany and spends most of his time supporting clients in their quest for more effective ways to work. Mostly by applying lean and agile concepts.

Running his own computer and software related companies since he was 18, he quickly came to realize that software architecture and (development) processes are in a way timeless aspects of the craft.

Nowadays a lot of his work focuses on processes and human interactions – a field in which he engages both professionally as well as pro bono (for example he is one of the people who started and run the [Limited WIP Society Cologne](#)¹¹⁴).

Michael's architectural work therefore tends to be dealing with the impact(s) and implications of architectural and process decisions *on each other* and the relative optimization strategies.

Andreas Rausch

Prof. Dr. Andreas Rausch is head of the chair for Software Systems Engineering at Clausthal University of Technology.

He received his doctorate in 2001 at the Technical University of Munich, at the chair of Prof. Dr. Manfred Broy. His main research interests in the field of software systems engineering are software architectures, model-based software development and process models. He has published more than 70 international papers in these areas.

Roger Rhoades

Roger Rhoades is founder of [Albion](#)¹¹⁵, a training and consulting company in Germany.

Roger has over 25 years of practical experience in the field of enterprise, business, and software architecture as well as management of international teams and projects. This practical experience is integrated into his training courses to ensure that class participants not only understand the theoretical content, but also the real-world challenges of its implementation.

¹¹³<http://consulting-guild.de>

¹¹⁴<http://lwscologne.de>

¹¹⁵<https://albionacademy.de>

Since 2012, Roger regularly presents at international conferences (e.g. EAMKon, Lean42 EAM, IT Strategy and Governance).

Since 2014, Roger has been an active member of the International Software Architecture Qualification Board (iSAQB e.V.¹¹⁶). He actively supports the evolution of the foundation and advanced curricula, exam questions, and case studies in addition to the iSAQB glossary.

Sebastian Fichtner

Founder of [flowtoolz.com](https://www.flowtoolz.com)¹¹⁷. App engineer and consultant. Started coding in 1995. Passionate about architecture ever since. Does original apps, open source and projects for various clients. Loves Apple platforms and the language Swift.

¹¹⁶<http://isaqb.org>

¹¹⁷<https://www.flowtoolz.com>

Appendix C: About our Cause



ELECTRONIC FRONTIER FOUNDATION

eff.org

All royalties of this book are donated to the EFF. By paying for this book, you support their cause:

“The **Electronic Frontier Foundation** is the leading nonprofit organization defending civil liberties in the digital world. Founded in 1990, EFF champions user privacy, free expression, and innovation through impact litigation, policy analysis, grassroots activism, and technology development. We work to ensure that rights and freedoms are enhanced and protected as our use of technology grows.

Even in the fledgling days of the Internet, EFF understood that protecting access to developing technology was central to advancing freedom for all. In the years that followed, EFF used our fiercely independent voice to clear the way for open source software, encryption, security research, file sharing tools, and a world of emerging technologies.

Today, EFF uses the unique expertise of leading technologists, activists, and attorneys in our efforts to defend free speech online, fight illegal surveillance, advocate for users and innovators, and support freedom-enhancing technologies.

Together, we forged a vast network of concerned members and partner organizations spanning the globe. EFF advises policymakers and educates the press and the public through comprehensive analysis, educational guides, activist workshops, and more. EFF empowers hundreds of thousands of individuals through our Action Center and has become a leading voice in online rights debates.

EFF is a donor-funded US 501(c)(3) nonprofit organization that depends on your support to continue fighting for users.”

(Quote from eff.org/about¹¹⁸)

¹¹⁸<http://eff.org/about>